


## Uponor S-PRESS PLUS U-tap elbow mixer 20-20-R3/4"MT

1070637

- Fixed stainless steel sleeve
- for inwall mixer and flushing tank connection in serial and loop installation.

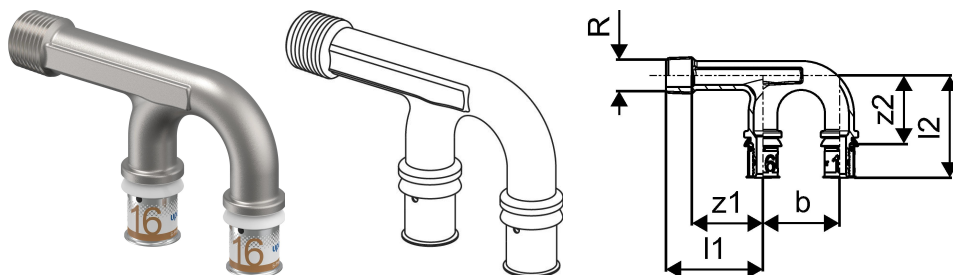

### Application information Uponor S-PRESS PLUS U-tap elbow mixer

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor S-PRESS PLUS U-tap elbow mixer 20-20-R3/4"MT

1070637

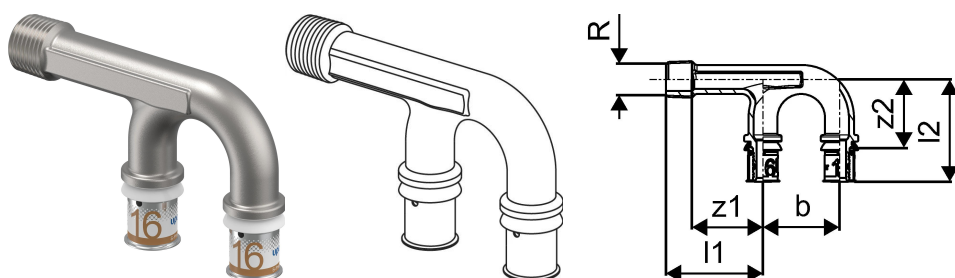

### Product code

Item no EAN	6414905219537
Item no GF	35001070637
Item no GTIN	06414905219537

### Dimensions

Item Unit Height	26.7
Item Unit Length	118.9
Item Unit Weight	0,281
Item Unit Width	74.9
Item_UOM	pce

### Measurements

Length (l1)	61
Length (l2)	61,5
Male_thread_R	3/4
Z Measurement b	45
z1	41,5
Z2	40,2

### Packaging

Packaging GTIN PL1	06414905468935
Packaging GTIN PL4	06414905499861
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	960
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	1,485
Packaging Weight PL4	309,12
Packaging Width PL1	135
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)