


## Uponor S-Press PLUS tap elbow M 16-Rp3/8"FT

**1070638**

- Made of tin-plated DR brass
- for on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.

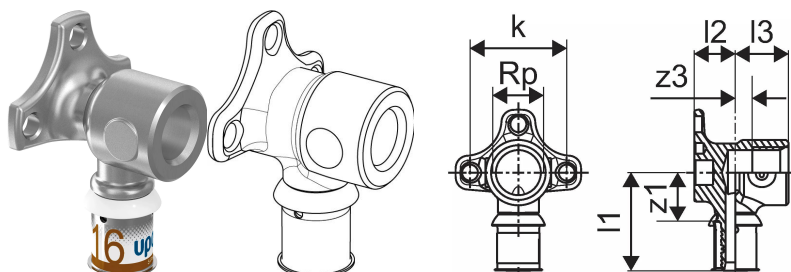

### Application information Uponor S-Press PLUS tap elbow M

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor S-Press PLUS tap elbow M 16-Rp3/8"FT

1070638

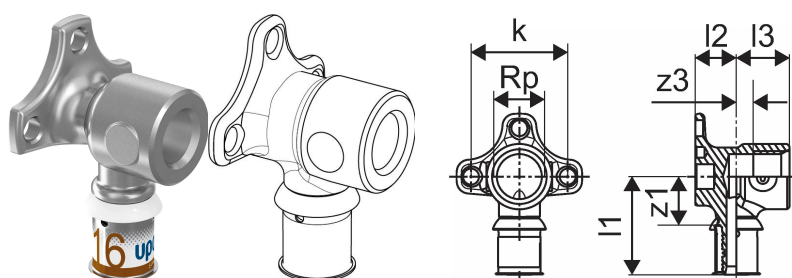

### Technical data

Item (unit of measurement)	pce
Item no NRF	5114547
Female thread Rp	3/8 inch
Length (l1)	41 mm
Length (l2)	17 mm
Length (l3)	22 mm
Z-measurement k	40 mm
Z-measurement z3	11 mm
Packaging Quantity PL1	10
Packaging Quantity PL3	40
Packaging Quantity PL4	1920

### Documents

Page with all documents 

#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E [info@uponor.com](mailto:info@uponor.com)  
F +358 (0)20 129 2841

[www.uponor.com](http://www.uponor.com)