
Product data sheet



GF Uponor S-Press PLUS tap elbow M FT 16-Rp1/2"

1070639

- Made of tin-plated DR brass (lead-free)
- for on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.

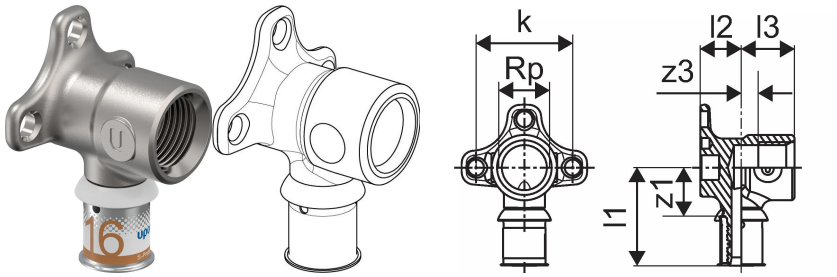

Application information GF Uponor S-Press PLUS tap elbow M FT

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:
- Male and female threads acc.to EN 10226-1.


Certification


- Approvals by local OM.

E.g.
- DVGW
- AENOR

GF Uponor S-Press PLUS tap elbow M FT 16-Rp1/2"

1070639

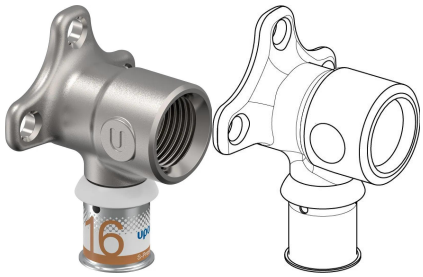

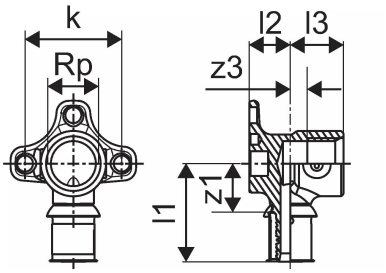

Measurements

Female thread Rp	1/2
Length (l1)	40,5
Length (l2)	17
Length (l3)	22
Z Measurement k	40
z1	20,7
Z3	7

Product code

Item no EAN	6414905219551
Item no GF	35001070639
Item no GTIN	06414905219551
Item no NOBB	55172793
Item no NRF	5114548
Item no RSK	1896550
Item no VVS	045475016

Dimensions

Item Unit Height	40
Item Unit Length	66.5
Item Unit Weight	0,136
Item Unit Width	51
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905291960
Packaging GTIN PL3	06414905424832
Packaging GTIN PL4	06414905291984

Packaging Height PL1	89
Packaging Height PL3	188
Packaging Height PL4	708
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	40
Packaging Quantity PL4	1920
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL3	0,009321604
Packaging Volume PL4	0,67968
Packaging Weight PL1	1,429
Packaging Weight PL3	5,976
Packaging Weight PL4	312,48
Packaging Width PL1	135
Packaging Width PL3	179
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+