
## Uponor S-Press PLUS adapter wall penetr. 16-G1/2"FT

#### 1070652

- For lead-through through walls.
- Dimensions of attachment plate (H x W x D) 100 x 50 x 2 mm.
- Hole circle diameter 33 mm.

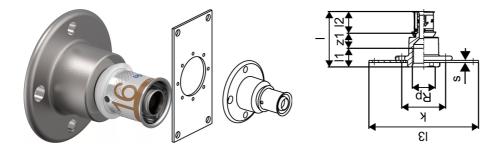

### Application information Uponor S-Press PLUS adapter wall penetr.

#### **Specification**

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with insprection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### **Application**

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

F.a


- DVGW
- AENOR

# Uponor S-Press PLUS adapter wall penetr. 16-G1/2"FT

1070652

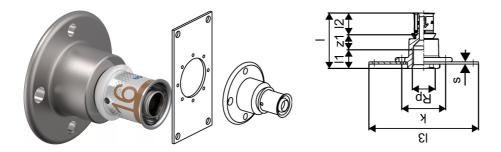

#### **Documents**





#### **Uponor Corporation**

Ilmalantori 4 00240, Helsinki Finland

T +358 (0)20 129 211

www.uponor.com