


Uponor S-Press PLUS radi elbow adapter plated 16-15CU l=350mm

1070678

- With copper pipe 15 x 1 mm and 22 x 1 mm, plated.
- The connection of the plated copper pipe 15 x 1 mm to the radiator can be made with the Uponor clamp compression adapter Cu (Item-No. 1013830).

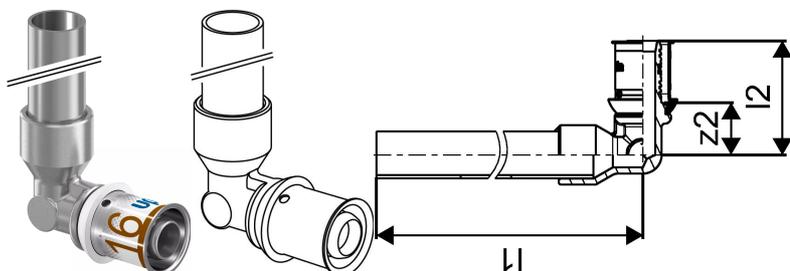

Application information Uponor S-Press PLUS radi elbow adapter plated

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS radi elbow adapter plated 16-15CU l=350mm

1070678

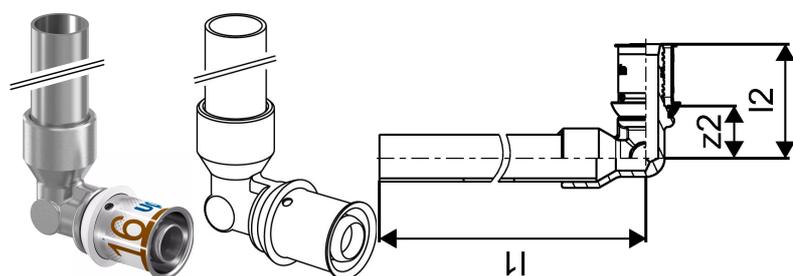

Product code

Item no EAN	6414905219940
Item no GF	35001070678
Item no GTIN	06414905219940
Item no LVI	1720808
Item no RSK	1896565
Item no VVS	404730016

Dimensions

Item Unit Height	46
Item Unit Length	376.6
Item Unit Weight	0,169
Item Unit Width	21.9
Item_UOM	pce

Measurements

Length (l1)	366
Length (l2)	36,5
Z2	16,7

Technical data

Recycling Text Block PL1	Corrugated fibreboard
--------------------------	-----------------------

Packaging

Packaging GTIN PL1	06414905286898
Packaging GTIN PL4	06414905286904
Packaging Height PL1	80
Packaging Height PL4	704
Packaging Length PL1	395
Packaging Length PL4	1200
Packaging Material (number) PL1	20
Packaging Material PL1	Corrugated fibreboard

Packaging Material (short) PL1	PAP
Packaging Quantity PL1	20
Packaging Quantity PL4	1680
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00632
Packaging Volume PL4	0,67584
Packaging Weight PL1	3,502
Packaging Weight PL4	318,168
Packaging Width PL1	200
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com