


## Uponor S-Press PLUS radi elbow adapter plated 16-15CU l=350mm

1070678

- With copper pipe 15 x 1 mm and 22 x 1 mm, plated.
- The connection of the plated copper pipe 15 x 1 mm to the radiator can be made with the Uponor clamp compression adapter Cu (Item-No. 1013830).

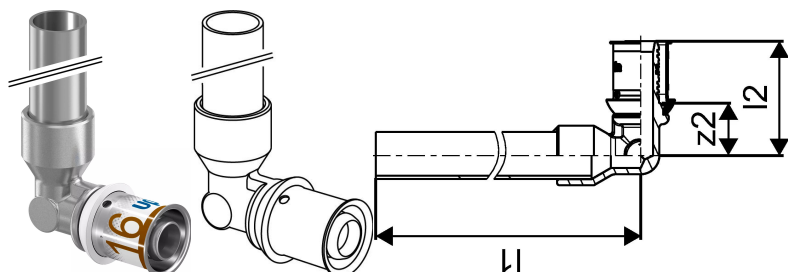

### Application information Uponor S-Press PLUS radi elbow adapter plated

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS radi elbow adapter plated 16-15CU l=350mm

1070678

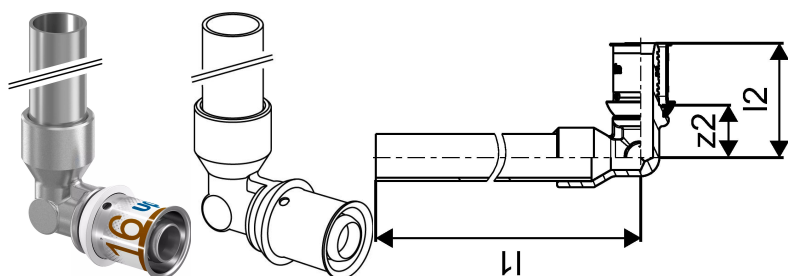

### Product code

|              |                |
|--------------|----------------|
| Item no EAN  | 6414905219940  |
| Item no GF   | 35001070678    |
| Item no GTIN | 06414905219940 |
| Item no LVI  | 1720808        |
| Item no RSK  | 1896565        |
| Item no VVS  | 404730016      |

### Dimensions

|                  |       |
|------------------|-------|
| Item Unit Height | 46    |
| Item Unit Length | 376.6 |
| Item Unit Weight | 0,169 |
| Item Unit Width  | 21.9  |
| Item_UOM         | pce   |

### Measurements

|             |      |
|-------------|------|
| Length (l1) | 366  |
| Length (l2) | 36,5 |
| Z2          | 16,7 |

### Packaging

|                                 |                       |
|---------------------------------|-----------------------|
| Packaging GTIN PL1              | 06414905286898        |
| Packaging GTIN PL4              | 06414905286904        |
| Packaging Height PL1            | 80                    |
| Packaging Height PL4            | 704                   |
| Packaging Length PL1            | 395                   |
| Packaging Length PL4            | 1200                  |
| Packaging Material (number) PL1 | 20                    |
| Packaging Material PL1          | Corrugated fibreboard |
| Packaging Material (short) PL1  | PAP                   |
| Packaging Quantity PL1          | 20                    |

|                        |          |
|------------------------|----------|
| Packaging Quantity PL4 | 1680     |
| Packaging Type PL1     | Base_Box |
| Packaging Type PL4     | Pallet   |
| Packaging Volume PL1   | 0,00632  |
| Packaging Volume PL4   | 0,67584  |
| Packaging Weight PL1   | 3,502    |
| Packaging Weight PL4   | 318,168  |
| Packaging Width PL1    | 200      |
| Packaging Width PL4    | 800      |

## Technical data

|                          |                       |
|--------------------------|-----------------------|
| Recycling Text Block PL1 | Corrugated fibreboard |
|--------------------------|-----------------------|

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)