


## Uponor S-Press PLUS radi elbow adapter plated 16-15CU l=1000mm

**1070679**

- With copper pipe 15 x 1 mm and 22 x 1 mm, plated.
- The connection of the plated copper pipe 15 x 1 mm to the radiator can be made with the Uponor clamp compression adapter Cu (Item-No. 1013830).

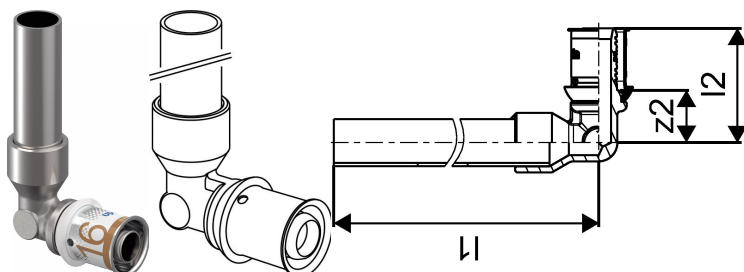

### Application information Uponor S-Press PLUS radi elbow adapter plated

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS radi elbow adapter plated 16-15CU l=1000mm

1070679

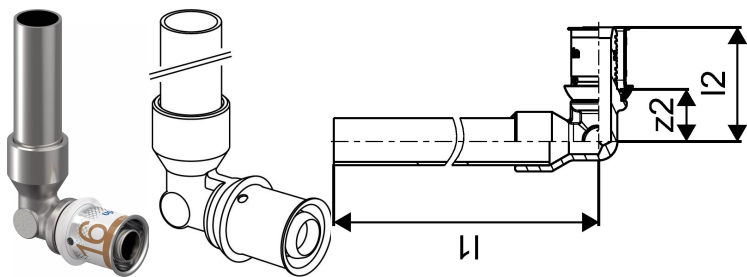

Technical data

|                            |           |
|----------------------------|-----------|
| Item (unit of measurement) | pce       |
| Item no VVS                | 404730036 |
| Length (l1)                | 1116 mm   |
| Length (l2)                | 37 mm     |
| Z-measurement z2           | 17 mm     |
| Packaging Quantity PL1     | 20        |
| Packaging Quantity PL4     | 400       |

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com