


## Uponor S-Press PLUS radi crossing insulated 20-16-16

**1070690**

- For cross-over-free connection of a radiator on the raw floor
- Incl. insulation box, consisting of upper and lower part made of EPP (expanded polypropylene) with 13 mm insulation layer (corresponds to 50 % insulation in compliance with EnEV), WLG 035. Meets EnEV requirements in respect of pipe cross-overs and wall penetrations!
- Dimensions of insulation box
- (Length x Width x Height): 115 x 115 x 55 mm.

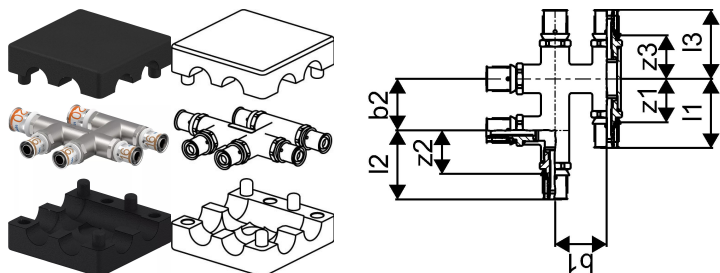

### Application information Uponor S-Press PLUS radi crossing insulated

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS radi crossing insulated 20-16-16

1070690

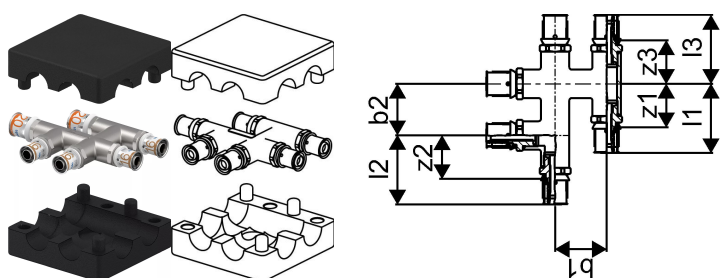

### Product code

Item no EAN	6414905220069
Item no GF	35001070690
Item no GTIN	06414905220069
Item no RSK	2194838

### Dimensions

Item Unit Height	56
Item Unit Length	148.5
Item Unit Weight	0,574
Item Unit Width	131.5
Item_UOM	pce

### Measurements

Length (l1)	56
Length (l2)	56
Length (l3)	55
Wall thickness_s	40
Z Measurement b1	40
Z Measurement b2	40
z1	33,7
Z2	33,7
Z3	33,7

### Packaging

Packaging GTIN PL1	06414905469017
Packaging GTIN PL4	06414905499946
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200

Packaging Quantity PL1	1
Packaging Quantity PL4	192
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,654
Packaging Weight PL4	149,568
Packaging Width PL1	135
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)