


## Uponor S-Press PLUS adapter 20-15CU

1070707

- Made of tin-plated brass

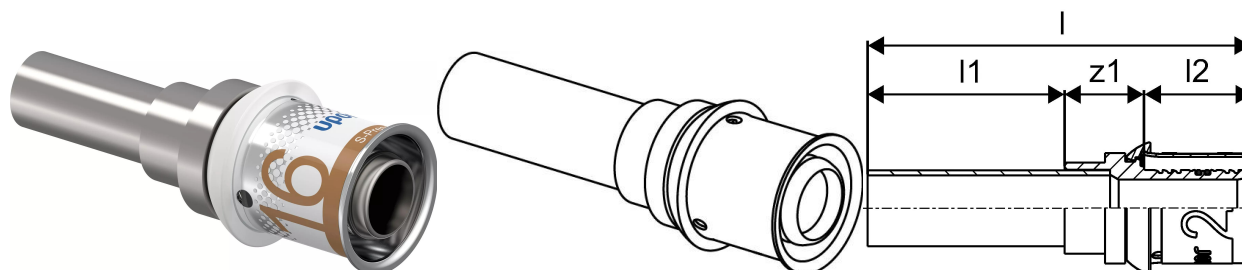

### Application information Uponor S-Press PLUS adapter

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor S-Press PLUS adapter 20-15CU

1070707

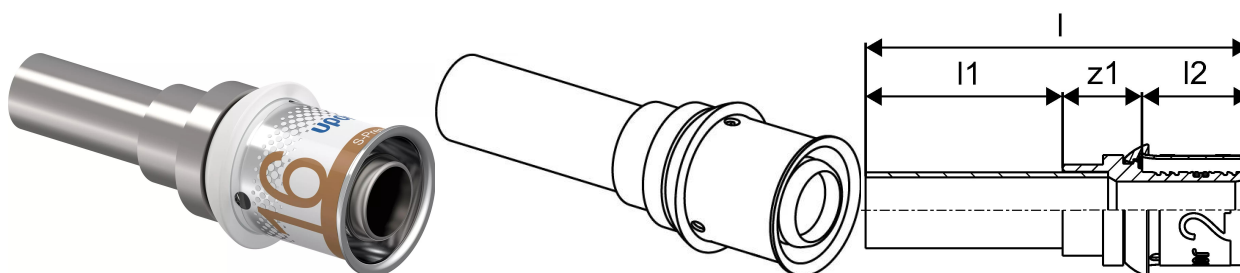

### Product code

Item no EAN	6414905221592
Item no GF	35001070707
Item no GTIN	06414905221592
Item no LVI	1720801
Item no NOBB	55171442
Item no NRF	5114564
Item no RSK	1899440
Item no VVS	045485020

### Dimensions

Item Unit Height	26
Item Unit Length	76
Item Unit Weight	0,055
Item Unit Width	26
Item_UOM	pce

### Measurements

LENGTH_L	76
Length (l1)	39
Length (l2)	21,3
z1	15,7

### Packaging

Packaging GTIN PL1	06414905469055
Packaging GTIN PL4	06414905499984
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	10

Packaging Quantity PL4	3840
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,587
Packaging Weight PL4	250,56
Packaging Width PL1	67
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)