


Uponor Fluvia Move pumpgroup EPG-6-A-W

1078310

- Pre-mounted
- Fluvia Move pump groups with supply temperature controller Uponor Smatrix Move
- Fluvia T can be installed with brackets left or right on the installation
- Max. primary temperature: 90°C
- Max. secondary temperature: 55 - 60°C
- Necessary control accessories:
- Uponor Smatrix Thermostat T-168 (1071689)
- Uponor Smatrix Antenna (1071676)

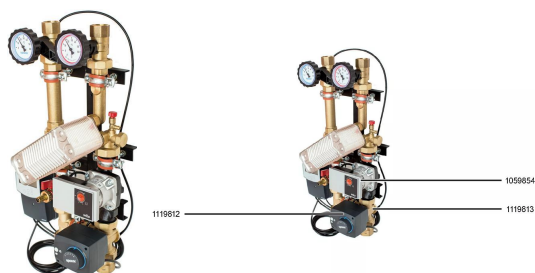

Application information Uponor Fluvia Move pumpgroup EPG-6-A-W

Specification


- Pumpgroup pre-mounted with supply temperature controller Uponor Smatrix Move
- Outdoor temperature sensor (for installation on buildingsite)
- Water temperature sensor for supply temperature
- 3-way-mixing valve
- Motor drive
- Proportional pressure control
- Upgrade to heating/cooling possible

Application

- For weather compensated supply water temperature control
- Max. primary temperature: 90°C
- Max. secondary temperature: 55°C

Uponor Fluvia Move pumpgroup EPG-6-A-W

1078310

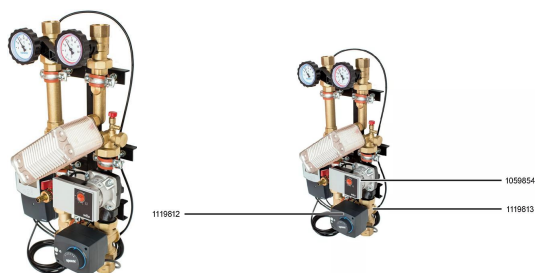

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com