


## Uponor Ecoflex jointing equal PN6 125x11,4-125x11,4

**1078365**

- Connection of PE-Xa or PE pipe
- 6 bar, SDR 11
- DR = dezincification resistance brass

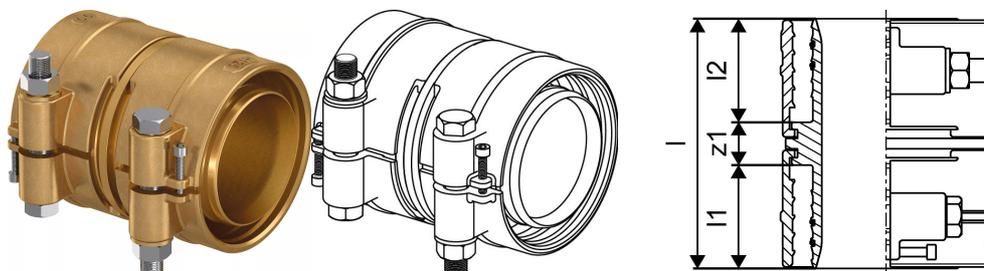

### Application information Uponor Ecoflex jointing equal PN6

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

#### Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex jointing equal PN6 125x11,4-125x11,4

1078365

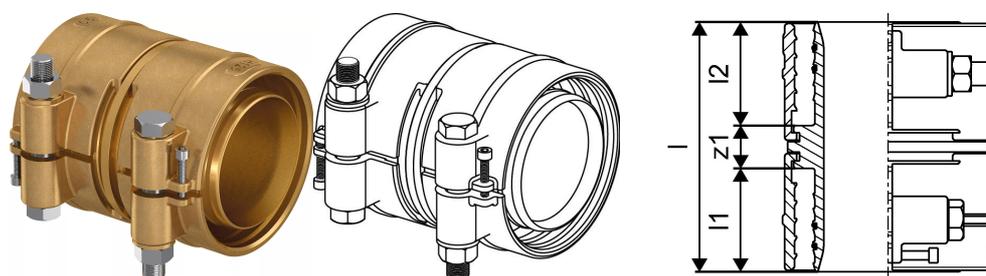

### Product code

Item no EAN	4021598130241
Item no GF	35001078365
Item no GTIN	04021598130241
Item no LVI	1938510
Item no NOBB	49606926
Item no NRF	8361337
Item no RSK	2282485
Item no VVS	087882325

### Dimensions

Item Unit Height	170
Item Unit Length	139
Item Unit Weight	7,66
Item Unit Width	158
Item_UOM	pce

### Measurements

LENGTH_L	169
Length (l1)	70
Length (l2)	70
Wall thickness_s	11,4
z1	29

### Packaging

Packaging GTIN PL1	06414900328265
Packaging Height PL1	155
Packaging Length PL1	295
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,009145

Packaging Weight PL1

7,77

Packaging Width PL1

200

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)