


## Uponor Ecoflex coupling PN6 125x11,4-R4

**1078368**

- Connection of PE-Xa or PE pipe
- 6 bar, SDR 11
- Conical thread R", hemp sealing
- Cannot be used with Wipex fittings!
- DR = dezincification resistance brass

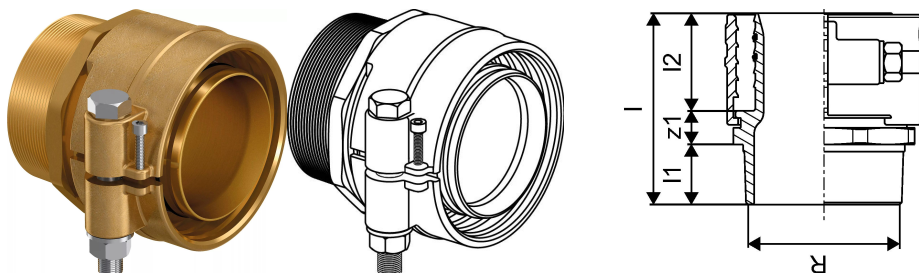

### Application information Uponor Ecoflex coupling PN6

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

#### Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex coupling PN6 125x11,4-R4

1078368

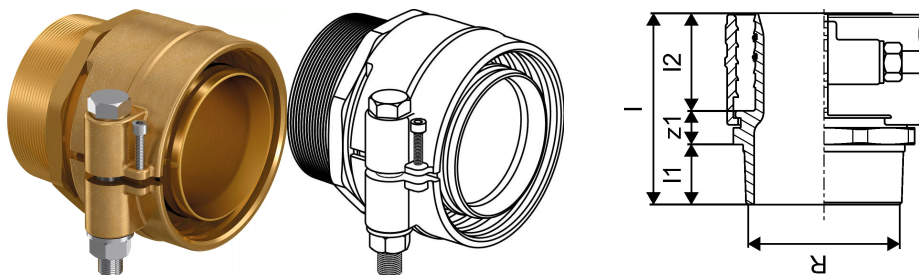

### Documents

Page with all documents



Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)