


Uponor Ecoflex reducer male x female R4-G3

1078369

- Outer conical thread R", hemp sealing
- Inner cylindrical thread G" with sealing ring
- 6 bar, SDR 11 / 10 bar, SDR 7,4
- DR = dezincification resistance brass

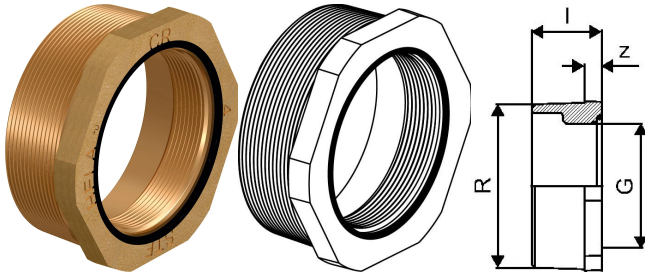

Application information Uponor Ecoflex reducer male x female

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex reducer male x female R4-G3

1078369

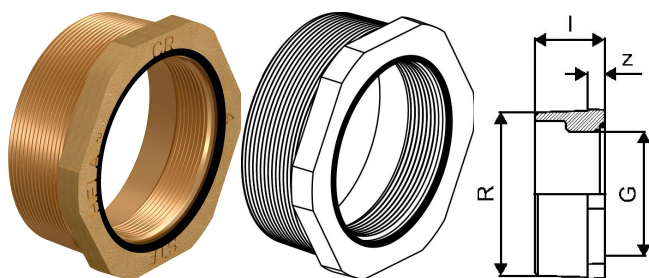

Measurements

Cylindric_thread_G	3
LENGTH_L	48
Male_thread_R	4
Z	12

Product code

Item no EAN	4021598130289
Item no GF	35001078369
Item no GTIN	04021598130289
Item no LVI	1938514
Item no NOBB	49606964
Item no NRF	8361342
Item no RSK	2282489
Item no VVS	087836194

Dimensions

Item Unit Height	48
Item Unit Length	120
Item Unit Weight	1,26
Item Unit Width	120
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900328302
Packaging GTIN PL2	06414900328357
Packaging Height PL1	50
Packaging Height PL2	155
Packaging Length PL1	135
Packaging Length PL2	290
Packaging Quantity PL1	1

Packaging Quantity PL2	6
Packaging Type PL1	Base_Box
Packaging Type PL2	Medium_Box
Packaging Volume PL1	0,00084375
Packaging Volume PL2	0,00899
Packaging Weight PL1	1,27
Packaging Weight PL2	7,72
Packaging Width PL1	125
Packaging Width PL2	200

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com