
Product data sheet



GF Uponor Smatrix relay module H/C M-1XX 24V

1083576

- interface to a heating/cooling source
- switch over H/C between Uponor Smatrix and H/C source
- incl. socket for DIN rail mounting, manual, mounting material
- contact: 2 change-over (CO)
- Ucoil: 24VDC
- test voltage: 5kV
- protection class: IP40
- switching voltage: 380VAC, 125VDC
- switching current: 5A@250VAC, 5A@30VDC
- contact material: Ag+Au plated
- temperature range: -40°C...+70°C

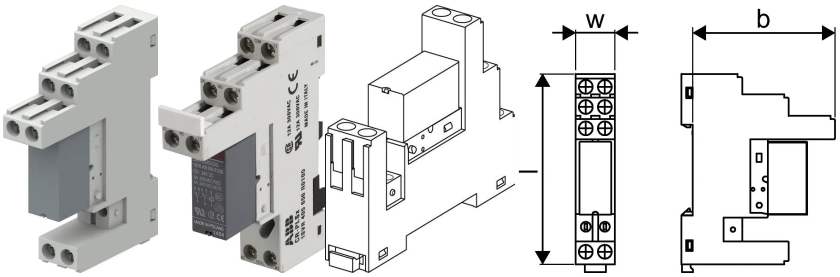

Application information GF Uponor Smatrix relay module H/C M-1XX

Specification

- Pulse com module R-208 is compatible with Base controller Pulse X-245 and Wave controller Pulse X-265
- functions of the Smatrix Pulse system with Pulse com module R-208 are , e.g. up to 4 controllers in one system, relative humidity control, ceiling cooling control, app for mobile devices with installation wizard and intuitive user interface, on-site access for commissioning and service, remote access via app for internet connected systems *, Smatrix AI for energy savings in installations with heat pumps * , timer programming with app *, comfort settings, automatic software updates * (* function requires internet connected system)

- Relay module H/C (variants 230 VAC / 24 VDC) is compatible with Smatrix Pulse and Smatrix Base Pro.


Application

- Room temperature control for radiant heating and cooling

- App for mobile devices and cloud connectivity for Smatrix Pulse systems. Enables multi-controller installations, comfort settings, Smatrix AI, and many more
- Device interface to the heating/cooling source for changeover control

GF Uponor Smatrix relay module H/C M-1XX 24V

1083576

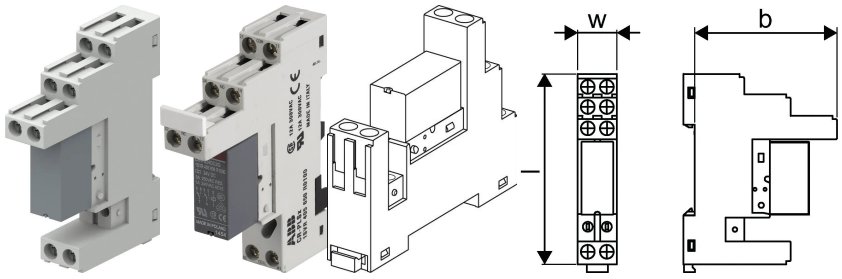

Product code

Item no EAN	4021598131095
Item no GF	35001083576
Item no GTIN	04021598131095
Item no LVI	2024537
Item no NRF	8361243
Item no RSK	5398343
Item no VVS	466252030

Dimensions

Item Unit Height	60
Item Unit Length	80
Item Unit Weight	0,041
Item Unit Width	15
Item_UOM	pce

Measurements

LENGTH_L	80
Z Measurement h	60
Z Measurement w	15

Packaging

Packaging GTIN PL1	06414905630066
Packaging GTIN PL3	06414905630141
Packaging GTIN PL4	06414905630387
Packaging Height PL1	15
Packaging Height PL3	300
Packaging Height PL4	1500
Packaging Length PL1	100

Packaging Length PL3	400
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL3	84
Packaging Quantity PL4	2016
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00012
Packaging Volume PL3	0,036
Packaging Volume PL4	1,44
Packaging Weight PL1	0,067
Packaging Weight PL3	6,55
Packaging Weight PL4	182,2
Packaging Width PL1	80
Packaging Width PL3	300
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+