
Product data sheet



GF Uponor Smatrix relay module H/C M-1XX 230V

1083577

- interface to a heating/cooling source
- switch over H/C between Uponor Smatrix and H/C source
- incl. socket for DIN rail mounting, manual, mounting material, wall box
- contact: 2 change-over (CO)
- Ucoil: 230VAC
- test voltage: 5kV
- protection class: IP40
- switching voltage: 380VAC, 125VDC
- switching current: 5A@250VAC, 5A@30VDC
- contact material: Ag+Au plated
- temperature range: -40°C...+70°C

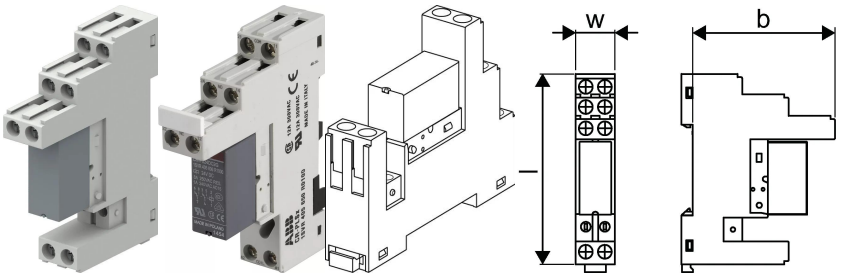

Application information GF Uponor Smatrix relay module H/C M-1XX

Specification

- Pulse com module R-208 is compatible with Base controller Pulse X-245 and Wave controller Pulse X-265
- functions of the Smatrix Pulse system with Pulse com module R-208 are , e.g. up to 4 controllers in one system, relative humidity control, ceiling cooling control, app for mobile devices with installation wizard and intuitive user interface, on-site access for commissioning and service, remote access via app for internet connected systems *, Smatrix AI for energy savings in installations with heat pumps * , timer programming with app *, comfort settings, automatic software updates * (* function requires internet connected system)

- Relay module H/C (variants 230 VAC / 24 VDC) is compatible with Smatrix Pulse and Smatrix Base Pro.


Application

- Room temperature control for radiant heating and cooling

- App for mobile devices and cloud connectivity for Smatrix Pulse systems. Enables multi-controller installations, comfort settings, Smatrix AI, and many more
- Device interface to the heating/cooling source for changeover control

GF Uponor Smatrix relay module H/C M-1XX 230V

1083577

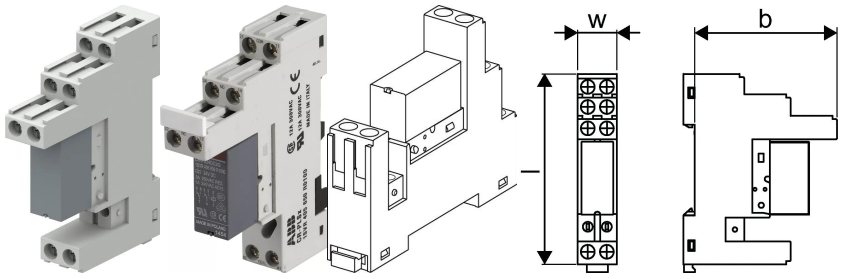

Product code

Item no EAN	4021598131101
Item no GF	35001083577
Item no GTIN	04021598131101
Item no LVI	2024538
Item no NRF	8361244
Item no RSK	5398344
Item no VVS	466252031

Dimensions

Item Unit Height	85
Item Unit Length	160
Item Unit Weight	0,184
Item Unit Width	55
Item_UOM	pce

Measurements

LENGTH_L	160
Z Measurement h	85
Z Measurement w	55

Packaging

Packaging GTIN PL1	06414905416615
Packaging GTIN PL3	06414905416622
Packaging GTIN PL4	06414905416639
Packaging Height PL1	70
Packaging Height PL3	300
Packaging Height PL4	1500
Packaging Length PL1	190

Packaging Length PL3	400
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL3	16
Packaging Quantity PL4	384
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0016625
Packaging Volume PL3	0,036
Packaging Volume PL4	1,44
Packaging Weight PL1	0,245
Packaging Weight PL3	4,76
Packaging Weight PL4	139,24
Packaging Width PL1	125
Packaging Width PL3	300
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+