


## Uponor Ecoflex Aqua Twin 25x3,5-20x2,8/140

**1084885**

- Warm tap water with circulation
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

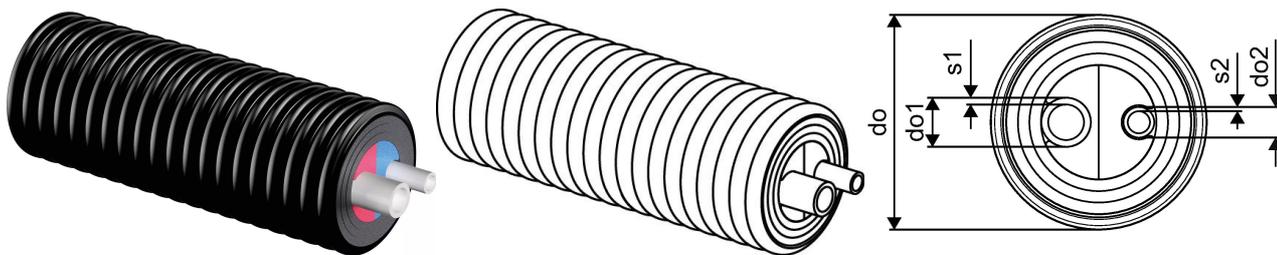

### Application information Uponor Ecoflex Aqua Twin

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approval should be checked by local responsible person

## Uponor Ecoflex Aqua Twin 25x3,5-20x2,8/140

1084885

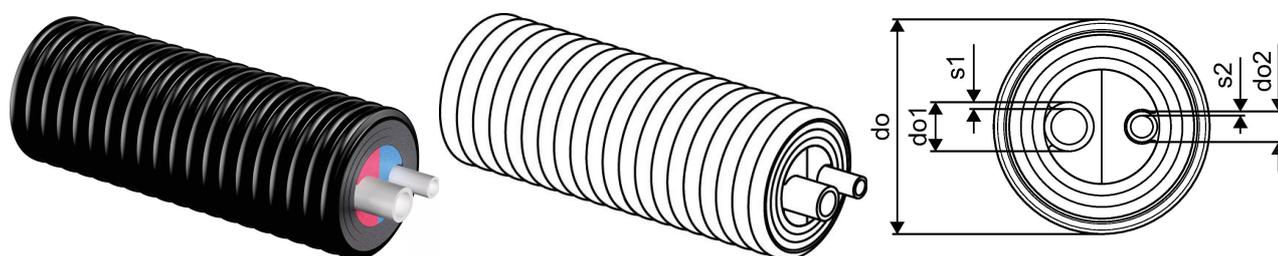

### Measurements

Bending radius M	0,65
Outer Diameter_do	140
Outer Diameter_do1	25
Outer Diameter_do2	20
Wall thickness_s1	3,5
Wall thickness_s2	2,8

### Product code

Item no EAN	4021598133143
Item no GF	35001084885
Item no GTIN	04021598133143
Item no LVI	3010168
Item no NRF	8360872
Item no RSK	2266159
Item no VVS	087363725

### Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	1,5
Item Unit Width	140
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905283484
Packaging Height PL1	2250
Packaging Length PL1	1400
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,0875

Packaging Weight PL1	300
Packaging Width PL1	2250

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)