


## Uponor Ecoflex Quattro Pipe 2x32x2,9-32x4,4-20x2,8/175

**1084889**

- Heating and warm tap water with circulation
- Four medium pipe PE-Xa, SDR 11 and 7,4
- Max. load 6 bar heating / 10 bar tap water / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion between the lines

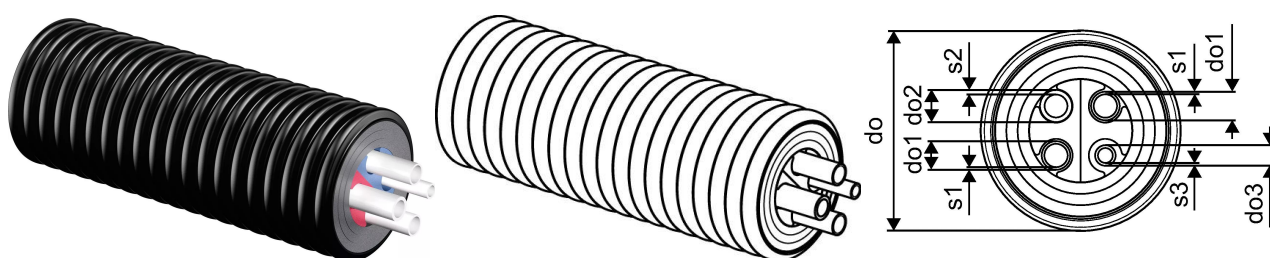

### Application information Uponor Ecoflex Quattro Pipe

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system
- Medium pipe: Cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) and PN10 (SDR 7,4), Oxygen tightness based on EN 15632 for heating pipes
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application

- Transport of heating and warm tap water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Tap water operating temperature 70°C based on EN ISO 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex Quattro Pipe 2x32x2,9-32x4,4-20x2,8/175

1084889



### Measurements

Bending radius M	0,8
Outer Diameter_do	175
Outer Diameter_do1	32
Outer Diameter_do2	32
Outer Diameter_do3	20
Wall thickness_s1	2,9
Wall thickness_s2	4,4
Wall thickness_s3	2,8

### Product code

Item no EAN	4021598133181
Item no GF	35001084889
Item no GTIN	04021598133181
Item no LVI	3010149
Item no NRF	8360878
Item no RSK	2266166
Item no VVS	087817733

### Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	3
Item Unit Width	175
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905283521
Packaging Height PL1	2400
Packaging Length PL1	1850
Packaging Quantity PL1	200

Packaging Type PL1	Coil
Packaging Volume PL1	10,656
Packaging Weight PL1	600
Packaging Width PL1	2400

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com