


Uponor Vario M manifold with flowmeter FM 11xG3/4 Euro 1086250

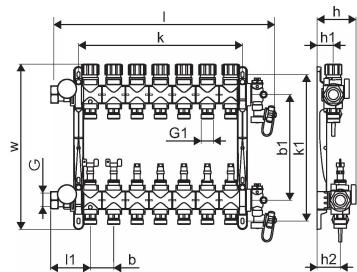

Application information Uponor Vario M manifold with flowmeter FM


Specification

- Made of fibre glass reinforced polyamid
- With integrated valves
- Connection right or left G1 with flat sealing
- Supply bar with flowmeter for balancing and shut-off
- Return bar with return valves and caps
- Integrated airvents and fill&drain points in supply and return
- Loop connection: G3/4" eurocone
- Loop pitch: 50 mm

Application

- For underfloor heating and cooling
- Max. pressure: 6 bar at 60°C
- Combineable with actuators FT 30x1,5

Uponor Vario M manifold with flowmeter FM 11xG3/4 Euro 1086250

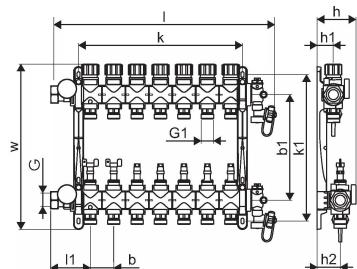

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com