


Uponor Vario ball valve, elbow Rp 3/4" - G1"

1086559

- Made of brass, nickel-plated

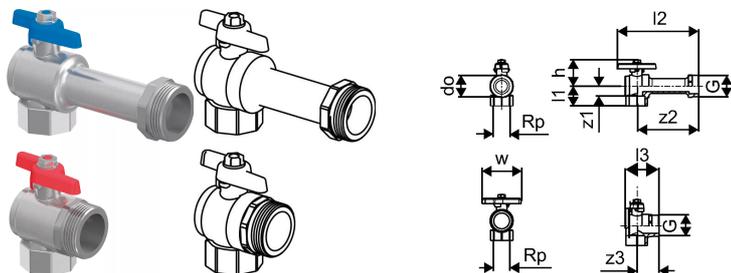

Application information Uponor Vario ball valve, elbow

Specification


- Components made of brass, nickel-plated brass, steel, and engineered plastics
- Eurocone, threaded, and flat-sealing connections
- Compatible with Vario B, C, S, M, PLUS, and MAGNA manifolds
- Includes valves, flowmeters, air vents, actuators, and adapters
- Designed for heating and cooling applications

Application

- Completion and extension of Vario manifold installations
- Flow regulation, balancing, and shut-off
- Connection of PEX, MLCP, and composite pipes
- Integration of actuators, sensors, and control units
- Commissioning, maintenance, and system optimization

Uponor Vario ball valve, elbow Rp 3/4" - G1"

1086559

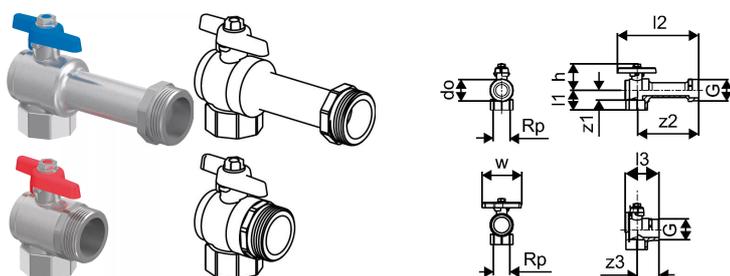

Measurements

Cylindric_thread_G	1
Female thread Rp	3/4
Length (l1)	31
Length (l2)	123
Length (l3)	51,5
Outer Diameter_do	33
Z Measurement h	42,5
Z Measurement w	60
z1	22
Z2	93
Z3	32,5

Product code

Item no EAN	4021598135406
Item no GF	35001086559
Item no GTIN	04021598135406
Item no LVI	2024554
Item no VVS	046231320

Dimensions

Item Unit Height	130
Item Unit Length	95
Item Unit Weight	0,78
Item Unit Width	70
Item_UOM	set

Packaging

Packaging GTIN PL1	06414905232598
Packaging Height PL1	130
Packaging Length PL1	115

Packaging Quantity PL1	1
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,0010465
Packaging Weight PL1	0,788
Packaging Width PL1	70

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com