


Uponor Ecoflex Quattro midi 2x25x2,3-25x3,5-20x2,8/140

1086836

- Heating and warm tap water with circulation
- Four medium pipe PE-Xa, SDR 11 and 7,4
- Max. load 6 bar heating / 10 bar tap water / 95°C
- PEX foam, HDPE casing
- One marked heating pipe to avoid confusion of flow and return line

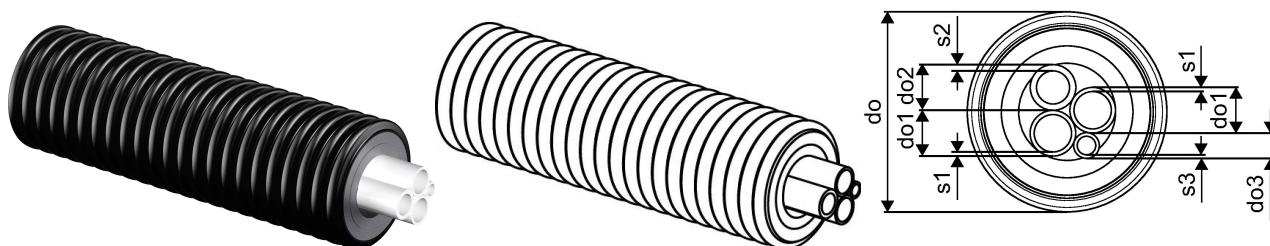

Application information Uponor Ecoflex Quattro midi

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system
- Medium pipe: Cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) and PN10 (SDR 7,4), Oxygen tightness based on EN 15632 for heating pipes
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and warm tap water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Tap water operating temperature 70°C based on EN ISO 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Quattro midi 2x25x2,3-25x3,5-20x2,8/140

1086836

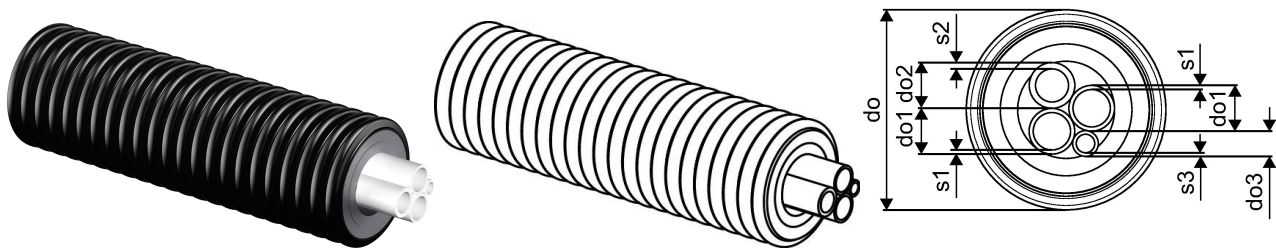

Technical data

| | |
|----------------------------|-----------|
| Item (unit of measurement) | m |
| Item no VVS | 087817840 |
| Bending radius 2 | 0,65 m |
| Wall thickness s3 | 2,8 mm |
| Packaging Quantity PL1 | 200 |

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com