


## Uponor Ecoflex Quattro midi 2x32x2,9-25x3,5-20x2,8/140

1086837

- Heating and warm tap water with circulation
- Four medium pipe PE-Xa, SDR 11 and 7,4
- Max. load 6 bar heating / 10 bar tap water / 95°C
- PEX foam, HDPE casing
- One marked heating pipe to avoid confusion of flow and return line

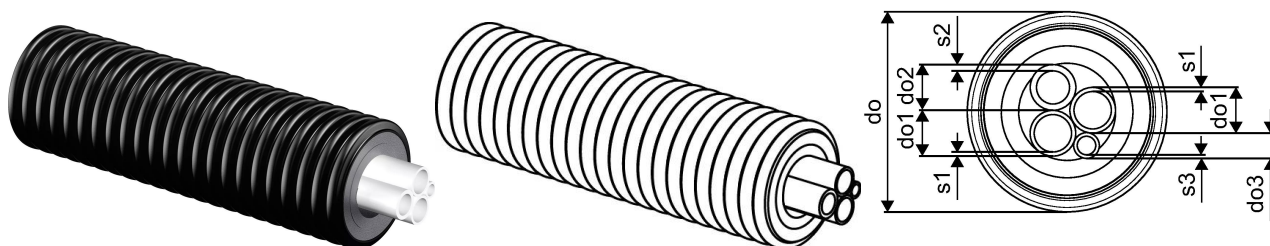

### Application information Uponor Ecoflex Quattro midi

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system
- Medium pipe: Cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) and PN10 (SDR 7,4), Oxygen tightness based on EN 15632 for heating pipes
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of heating and warm tap water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Tap water operating temperature 70°C based on EN ISO 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Quattro midi 2x32x2,9-25x3,5-20x2,8/140

1086837

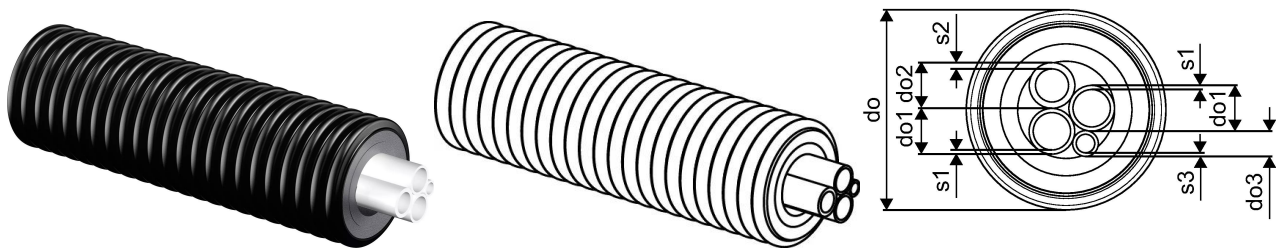

Technical data

|                            |           |
|----------------------------|-----------|
| Item (unit of measurement) | m         |
| Item no VVS                | 087817845 |
| Bending radius 2           | 0,7 m     |
| Wall thickness s3          | 2,8 mm    |
| Packaging Quantity PL1     | 200       |

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com