


Uponor Smatrix Base thermostat T-144 Bus flush RAL9016

1086973

- measures perceived room temperature
- designed for in-wall box installation including frame
- different frames can be used for installation in a switch rail frame
- protection class: IP30
- color: white glossy

- Functions:
- heating/cooling demand indication
- dip switch to enable/disable timer function if timer installed

- Consisting of:
- Uponor Smatrix Base thermostat flush T-144 Bus
- mounting material
- outer frame

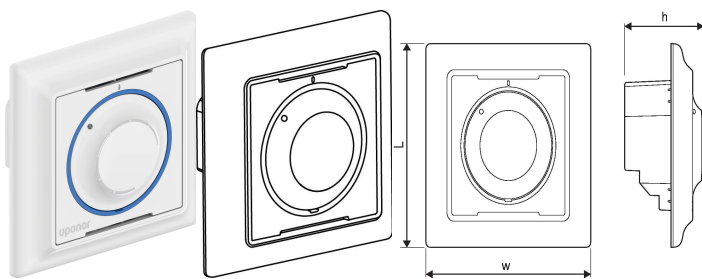

Application information Uponor Smatrix Base thermostat T-144 Bus flush

Specification

- up to 4 controller in one system
- operating voltage: 230V
- autobalancing optimises energy use and comfort
- electric control
- supports up to 6 room thermostats and 8 actuators (24V) per controller
- pump and boiler relays
- valve and pump exercise
- relative humidity control
- different wiring options (daisy chain / star)
- 4-wire Bus installation
- communication protocol: RS485 serial bus
- max. power input per actuator: 24VAC / 0.2A (0.4A peak)

Smatrix Base Pulse:

- local access (Wi-Fi) or remote access (internet connection required) via Uponor Smatrix Pulse App (with R-208)
- temporary wi-fi access point for direct access (if local wi-fi is not available) (with R-208)
- smart home ecosystem integration (Amazon Alexa, Google Home) (with R-208)
- multi-home control (with R-208)
- third-party access for remote support (user allowance required) (with R-208)
- history trend analysis via Uponor Smatrix Pulse app (with R-208)
- timer programming (with R-208)
- comfort settings (with R-208)
- supply diagnostics (with R-208)

Application


- wired room temperature control for radiant heating and cooling
- set point range: +5°C ... +35°C

Certification

- CE / EAC

Uponor Smatrix Base thermostat T-144 Bus flush RAL9016

1086973

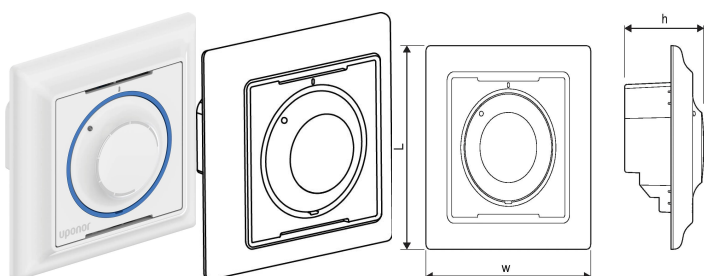

Product code

Item no EAN	4021598149038
Item no GF	35001086973
Item no GTIN	04021598149038
Item no LVI	2024516
Item no NOBB	51166882
Item no NRF	8361086
Item no RSK	2987780
Item no VVS	466253034

Dimensions

Item Unit Height	40
Item Unit Length	85
Item Unit Weight	0,067
Item Unit Width	90
Item_UOM	pce

Measurements

LENGTH_L	85
Z Measurement h	40
Z Measurement w	90

Packaging

Packaging GTIN PL1	06414905284450
Packaging GTIN PL3	06414905284467
Packaging GTIN PL4	06414905630400
Packaging Height PL1	50
Packaging Height PL3	300
Packaging Height PL4	1500
Packaging Length PL1	105
Packaging Length PL3	400

Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL3	60
Packaging Quantity PL4	1440
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0004725
Packaging Volume PL3	0,036
Packaging Volume PL4	1,44
Packaging Weight PL1	0,094
Packaging Weight PL3	10,8
Packaging Weight PL4	284,2
Packaging Width PL1	90
Packaging Width PL3	300
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com