

Uponor Smatrix Wave thermostat T-165 POD standard RAL9016

1086981


- measures perceived room temperature
- protection class: IP30
- color: white glossy

Functions:

- light indication behind dial after changing the set point
- heating/cooling demand indication
- dip switch to enable/disable timer function if timer installed
- optional: enable/disable timer function

Consisting of:

- Uponor Smatrix Wave thermostat standard T-165 POD
- 2x AAA batteries
- mounting material

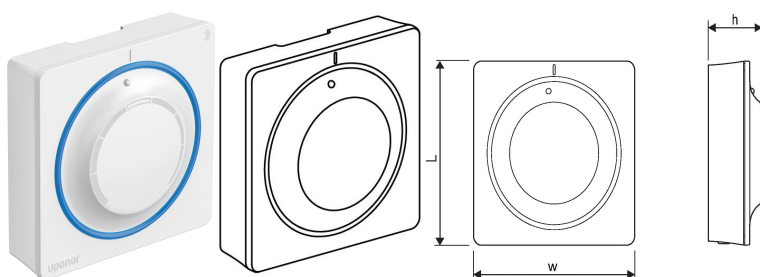

Application information Uponor Smatrix Wave thermostat T-165 POD standard

Specification

- up to 4 controller in one system
- operating voltage: 230V
- autobalancing optimises energy use and comfort
- electric control
- supports up to 6 room thermostats and 8 actuators (24V) per controller
- pump and boiler relays
- valve and pump exercise
- relative humidity control
- combines underfloor heating/cooling and ceiling cooling control
- max. power input per actuator: 24VAC / 0.2A (0.4A peak)

Smatrix Wave Pulse:

- local access (Wi-Fi) or remote access (internet connection required) via Uponor Smatrix Pulse App (with R-208)
- temporary wi-fi access point for direct access (if local wi-fi is not available) (with R-208)
- smart home ecosystem integration (Amazon Alexa, Google Home) (with R-208)
- multi-home control (with R-208)
- third-party access for remote support (user allowance required) (with R-208)
- history trend analysis via Uponor Smatrix Pulse app (with R-208)
- timer programming (with R-208)
- comfort settings (with R-208)
- supply diagnostics (with R-208)

Application


- wireless room temperature control for radiant heating and cooling
- set point range: +5°C ... +35°C

Certification

- CE / EAC

Uponor Smatrix Wave thermostat T-165 POD standard RAL9016

1086981

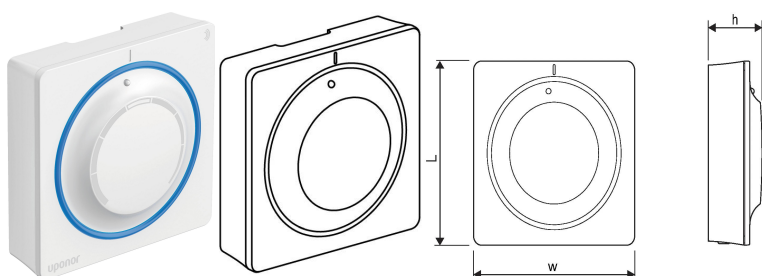

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com