


Uponor Klett pipe Comfort Pipe PLUS 16x2,0 240m

1087302

- UFH pipe made of PEX-a, with Klett hook tape
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

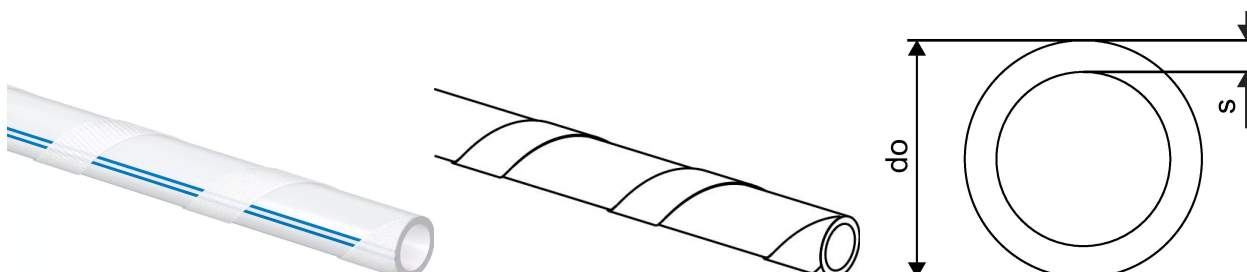

Application information Uponor Klett pipe Comfort Pipe PLUS

Specification

- Klett underfloor heating panel system, consists of Klett-foil for hook- and loop fixation laminated onto EPS according to EN 13163 and DIN 4108-10.
- based on hook- and loop fixation of Klett-pipes to insulation panels
- EN 13501-1 fire classification: class E
- standard flammability, building-material class B2, conforming to DIN 4102
- with self-adhesive tape at long side
- foil on the panel is printed with 100x100mm grid pattern

Application



- radiant underfloor heating and cooling
- for use with cement- and anhydrite-based screeds

Certification

- DIN CERTCO: 3V372 PE-Xa; 7F235-F; 7F236-F; 7F342-F

Uponor Klett pipe Comfort Pipe PLUS 16x2,0 240m

1087302

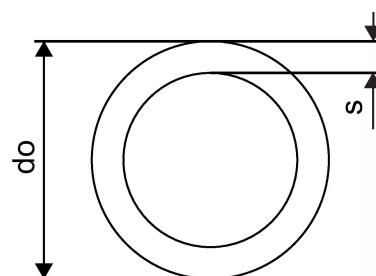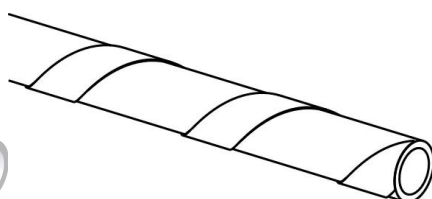

Product code

Item no EAN	6414905238248
Item no GF	35001087302
Item no GTIN	06414905238248
Item no NRF	8361312
Item no RSK	2717492

Dimensions

Item Unit Height	16
Item Unit Length	1000
Item Unit Weight	0,1
Item Unit Width	16
Item_UOM	m

Measurements

Outer Diameter_do	16
Wall thickness_s	2

Packaging

Packaging GTIN PL3	06414905285365
Packaging GTIN PL4	06414905285372
Packaging Height PL3	780
Packaging Height PL4	800
Packaging Length PL3	780
Packaging Length PL4	1200
Packaging Quantity PL3	240
Packaging Quantity PL4	1200
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL3	0,13689
Packaging Volume PL4	0,768

Packaging Weight PL3	24,24
Packaging Weight PL4	146,2
Packaging Width PL3	225
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com