


Uponor Klett Comfort Pipe PLUS 16x2,0 640m

1087303

- UFH pipe made of PEX-a, with Klett hook tape
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

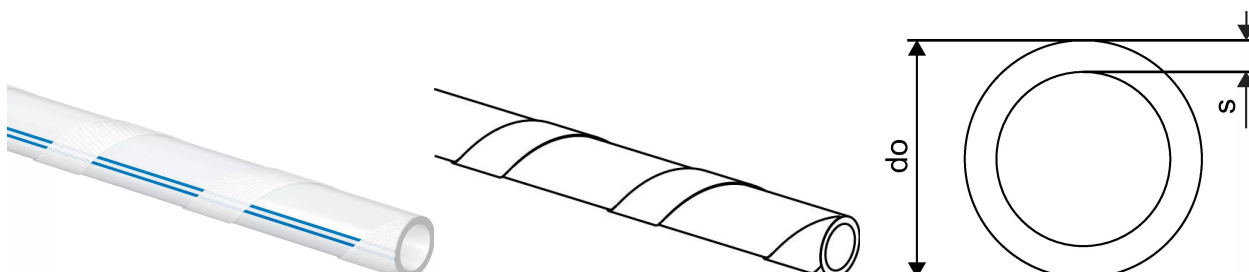

Application information Uponor Klett Comfort Pipe PLUS

Specification

- Klett underfloor heating panel system, consists of Klett-foil for hook- and loop fixation laminated onto EPS according to EN 13163 and DIN 4108-10.
- based on hook- and loop fixation of Klett-pipes to insulation panels
- EN 13501-1 fire classification: class E
- standard flammability, building-material class B2, conforming to DIN 4102
- with self-adhesive tape at long side
- foil on the panel is printed with 100x100mm grid pattern

Application


- radiant underfloor heating and cooling
- for use with cement- and anhydrite-based screeds

Certification

- DIN CERTCO: 3V372 PE-Xa; 7F235-F; 7F236-F; 7F342-F

Uponor Klett Comfort Pipe PLUS 16x2,0 640m

1087303

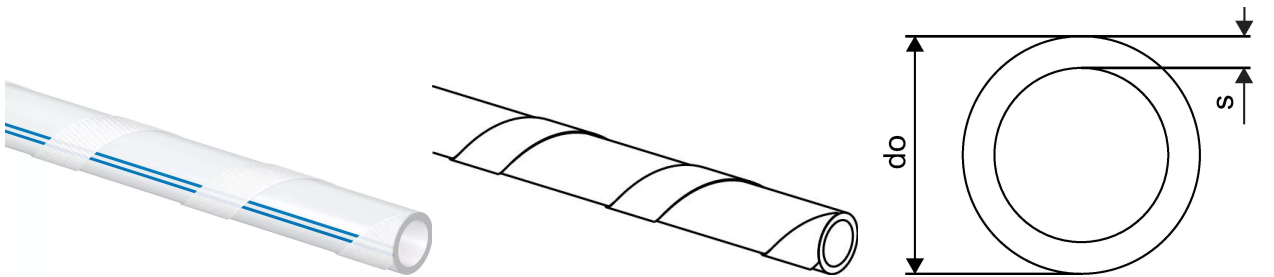

Technical data

Item (unit of measurement)	m
Item no NRF	8361313
Packaging Quantity PL3	640
Packaging Quantity PL4	1280

Documents

Page with all documents

Download icon

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com