


Uponor Vario S manifold FM 15x3/4 Euro

1088866

- Supply with flow meter for balancing and shutoff
- Return with valves and caps

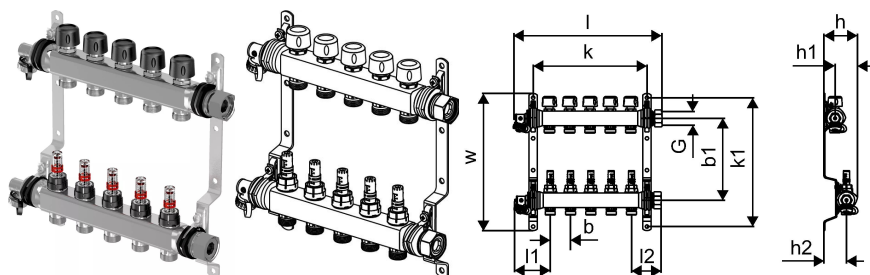

Application information Uponor Vario S manifold FM

Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S manifold FM 15x3/4 Euro

1088866

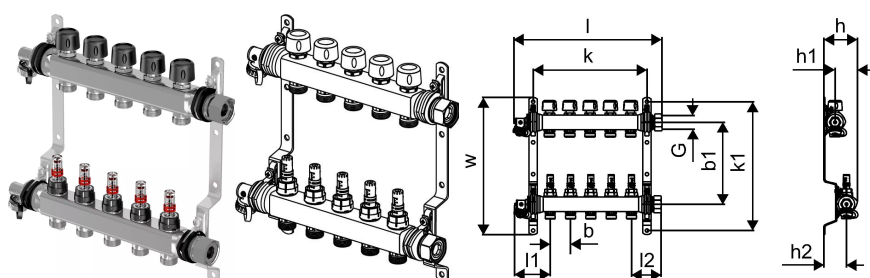

Technical data

Item (unit of measurement)	pce
Length (l)	860 mm
Length (l1)	87 mm
Length (l2)	73 mm
Z-measurement k	880 mm
Z-measurement b	50 mm
Z-measurement b1	215 mm
Z-measurement h	75 mm
Z-measurement h1	30 mm
Z-measurement h2	50 mm
Z-measurement k1	336 mm
Z-measurement w	357 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	36

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com