Product data sheet




GF Uponor S-Press valve straight 16

1089031

- Made of DR brass (lead-free)
- Contoured Aluminium-sleeve
- Fast 3-step installation (press without bevel)
- Colour code
- For cold and hot tap water application



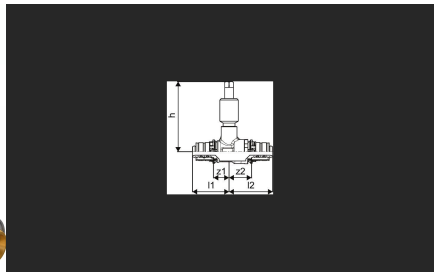

Application information GF Uponor S-Press valve straight

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:
Male and female threads acc.to EN 10226-1.


Certification

- Approvals by local OM.
E.g.
- DVGW
- AENOR

GF Uponor S-Press valve straight 16

1089031



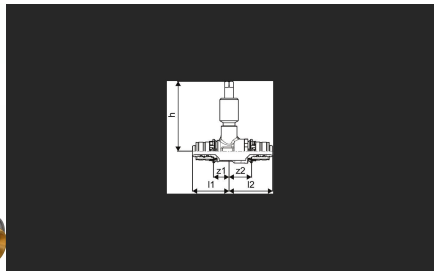

Product code

Item no EAN	6414905212514
Item no GF	35001089031
Item no GTIN	06414905212514

Dimensions

Item Unit Height	84
Item Unit Length	81.1
Item Unit Weight	0,198
Item Unit Width	25
Item_UOM	pce

Measurements

Length (l1)	37
Length (l2)	44,1
Z Measurement h	70,7
z1	15,7
Z2	22,8

Packaging

Packaging GTIN PL1	06414905235179
Packaging GTIN PL2	06414905270705
Packaging GTIN PL3	06414905271788
Packaging GTIN PL4	06414905276103
Packaging Height PL1	84
Packaging Height PL2	95
Packaging Height PL3	320
Packaging Height PL4	1730
Packaging Length PL1	150

Packaging Length PL2	120
Packaging Length PL3	265
Packaging Length PL4	1200
Packaging Material (number) PL1	4
Packaging Material (number) PL2	20
Packaging Material (number) PL3	20
Packaging Material PL1	Low density polyethylene
Packaging Material PL2	Corrugated fibreboard
Packaging Material PL3	Corrugated fibreboard
Packaging Material (short) PL1	LDPE
Packaging Material (short) PL2	PAP
Packaging Material (short) PL3	PAP
Packaging Quantity PL1	1
Packaging Quantity PL2	10
Packaging Quantity PL3	90
Packaging Quantity PL4	3240
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00189
Packaging Volume PL2	0,002736
Packaging Volume PL3	0,03392
Packaging Volume PL4	1,6608
Packaging Weight PL1	0,201
Packaging Weight PL2	2,07
Packaging Weight PL3	18,85
Packaging Weight PL4	703,6
Packaging Width PL1	150
Packaging Width PL2	240
Packaging Width PL3	400
Packaging Width PL4	800

Technical data

Recycling Text Block PL1	Low density polyethylene
Recycling Text Block PL2	Corrugated fibreboard
Recycling Text Block PL3	Corrugated fibreboard

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+