


Uponor Base flexiboard with pump logic X-27 8x 230V

1089088

- supports up to 8 thermostats (230V)
- supports up to 12 actuators (230V)
- rotary channel selector switch for quick actuator assignment
- pump relay 2A (230V)
- overload protection
- power: 10VA
- protection class: IP40

Consisting of:

- Uponor Base flexiboard with pump logic X-27 8X
- mounting material

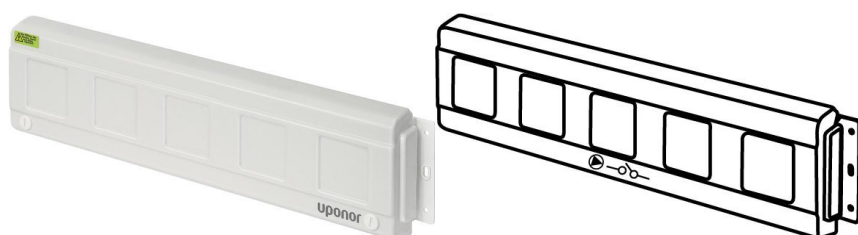

Application information Uponor Base flexiboard with pump logic X-27

Specification

- 230V standard wiring
- common wiring method and controls logic
- easy integration to standard on/off time control
- optional: pump logic

Application


- wired room temperature control for radiant heating

Certification

- CE, UKCA

Uponor Base flexiboard with pump logic X-27 8x 230V

1089088

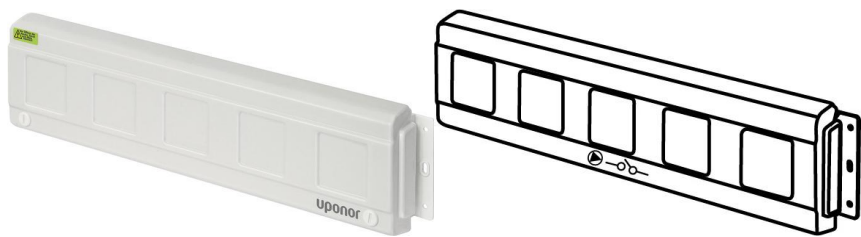

Technical data

Item (unit of measurement)	pce
Length (l)	368 mm
Z-measurement h	90 mm
Z-measurement w	65 mm
Packaging Quantity PL1	1

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com