


## Uponor Uni Pipe PLUS white insulated S6 WLS 040 20x2,25 blue 75m

1091724

- coil
- Insulation thickness 6 mm
- thermal conductivity  $\lambda=0,040$  W/m\*k
- round extruded

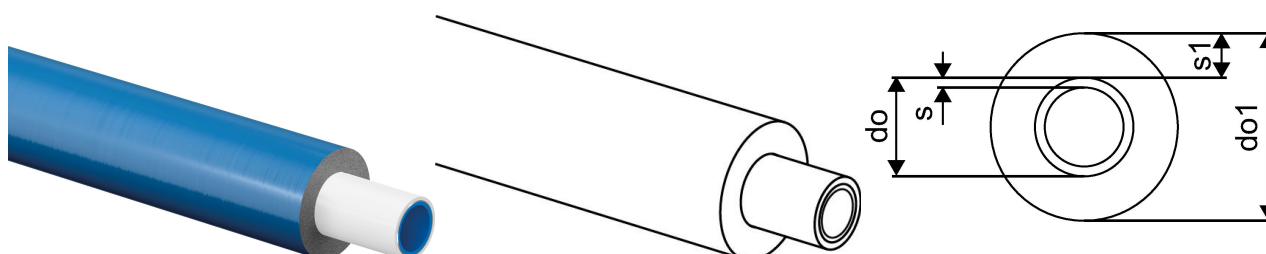

### Application information Uponor Uni Pipe PLUS white insulated S6 WLS 040

#### Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.


#### Application

- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

## Uponor Uni Pipe PLUS white insulated S6 WLS 040 20x2,25 blue 75m 1091724

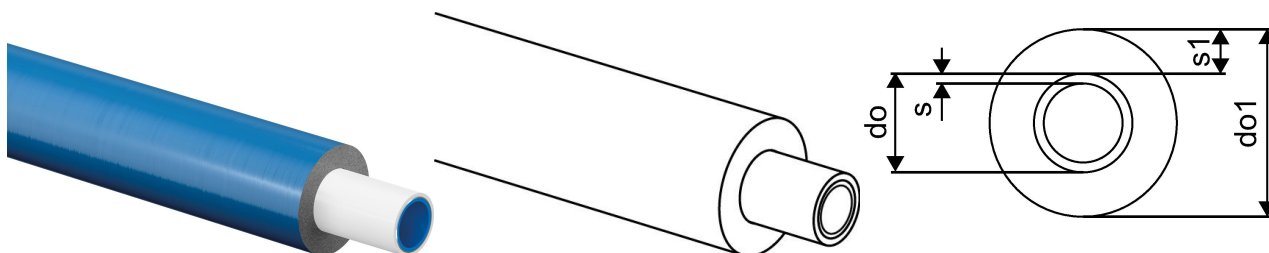

### Technical data

Item no EAN	6414905223565
Item no GTIN	06414905223565
Item (unit of measurement)	m
Packaging Quantity 1	75
Packaging Quantity 4	600
Packaging GTIN PL1	06414905269600
Packaging GTIN PL4	06414905277414
Item Unit Height	32 mm
Item Unit Weight	0,192 mm
Item Unit Width	32 mm

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)