
Product data sheet



GF Uponor Uni Pipe PLUS white insulated S6 WLS 040 25x2,5 blue 50m

1091725

- coil
- Insulation thickness 6 mm
- thermal conductivity λ=0,040 W/m*k
- round extruded

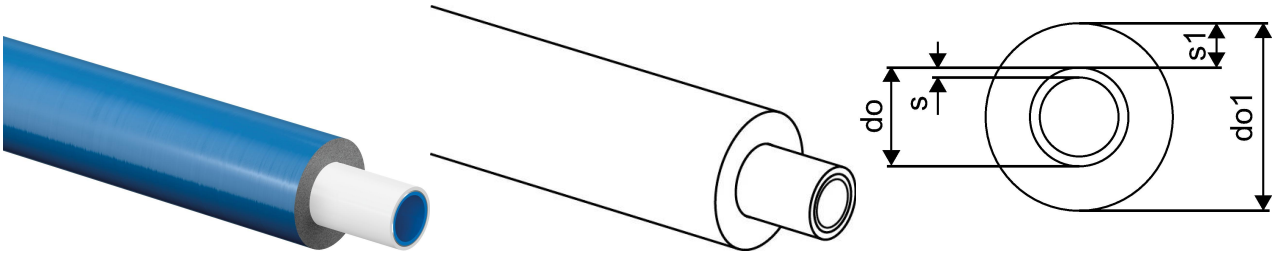

Application information GF Uponor Uni Pipe PLUS white insulated S6 WLS 040

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

Application

- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

GF Uponor Uni Pipe PLUS white insulated S6 WLS 040 25x2,5 blue 50m

1091725

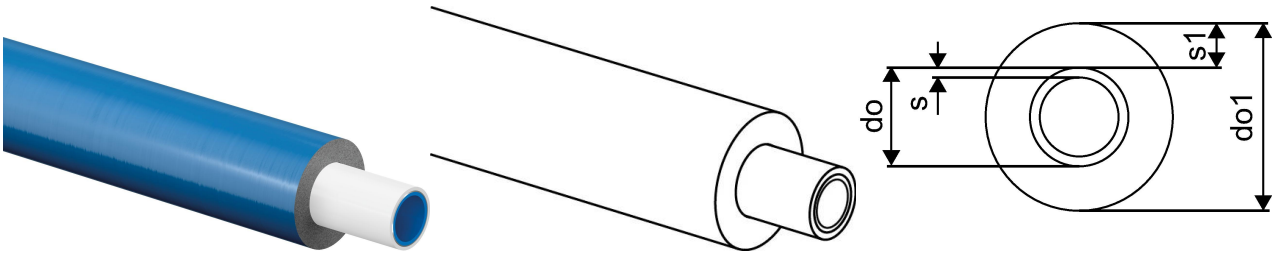

Product code

Item no EAN	6414905223572
Item no GF	35001091725
Item no GTIN	06414905223572

Dimensions

Item Unit Height	37
Item Unit Length	1000
Item Unit Weight	0,272
Item Unit Width	37
Item_UOM	m

Measurements

Length	50
Outer Diameter_do	25
Outer Diameter_do1	37
Wall thickness_s	2,5
Wall thickness_s1	6

Packaging

Packaging GTIN PL1	06414905269617
Packaging GTIN PL4	06414905277421
Packaging Height PL1	1140
Packaging Height PL4	2000
Packaging Length PL1	1140
Packaging Length PL4	1140
Packaging Quantity PL1	50
Packaging Quantity PL4	400
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,266418
Packaging Volume PL4	2,5992
Packaging Weight PL1	16,43
Packaging Weight PL4	141,94
Packaging Width PL1	205
Packaging Width PL4	1140

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+