


## Uponor Ecoflex Thermo Twin HP 2x32x2,9-2x32x3,5/140

**1093894**

- A to B or heat pump connection pipe, heating and cooling
- Two medium pipe PE-Xa with oxygen barrier, SDR 11
- Two cable conduits for power and data cables
- Max. load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- PEX foam, HDPE casing

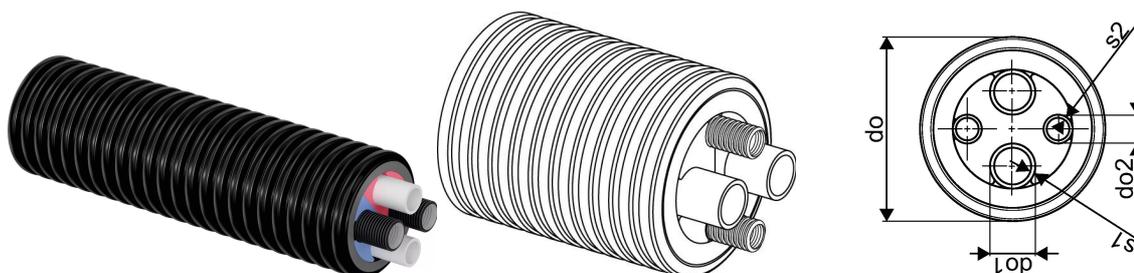

### Application information Uponor Ecoflex Thermo Twin HP

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: Cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11), oxygen tightness based on EN 15632.
- Insulating material: Closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex Thermo Twin HP 2x32x2,9-2x32x3,5/140

1093894

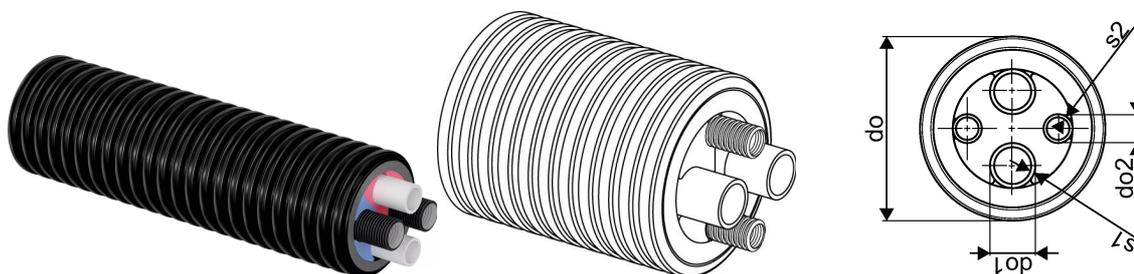

### Measurements

Bending radius M	0,5
Length	200
Outer Diameter_do	140
Outer Diameter_do1	32
Outer Diameter_do2	32
Wall thickness_s1	2,9
Wall thickness_s2	3,5

### Product code

Item no EAN	6414905231607
Item no GF	35001093894
Item no GTIN	06414905231607
Item no LVI	3010125
Item no RSK	2266306
Item no VVS	087808132

### Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	1,655
Item Unit Width	140
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905473526
Packaging Height PL1	2200
Packaging Length PL1	2200
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,26

Packaging Weight PL1

331

Packaging Width PL1

1500

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)