
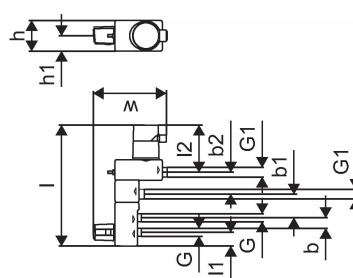


Uponor Fluvia T pumpgroup Push-12 AC-G

1095128

- Integrated pump: Q: 0,1 - 0,4 m³/h, H: 0,2 - 1,1 m, Phyd< 1W
- Bracket for left- or right installation
- Air bleed screw
- Secondary circuit temp. range 20-50°C
- Balancing valve
- Secondary loop 3/4" eurocone
- Primary valves with clampconnection for CU-Pipe 15mm
- For control of UFH in small zones
- Max. primary temperature: 90°C
- Max. secondary temperature: 55°C
- Pumpgroup with actuator 230 V and cable room sensor
- Secondary max. temperature limiter by 50°C



Application information Uponor Fluvia T pumpgroup Push-12 AC-G

Specification


- Integrated pump: Q: 0,1 - 0,4 m³/h, H: 0,2 - 1,1 m, Phyd< 1W
- Bracket for left- or right installation
- Air bleed screw
- Secondary circuit temp. range 20-50°C
- Balancing valve
- Secondary loop 3/4" eurocone
- Primary valves with clampconnection for CU-Pipe 15mm

Application

- For control of UFH in small zones
- Max. primary temperature: 90°C
- Max. secondary temperature: 55°C

Uponor Fluvia T pumpgroup Push-12 AC-G

1095128

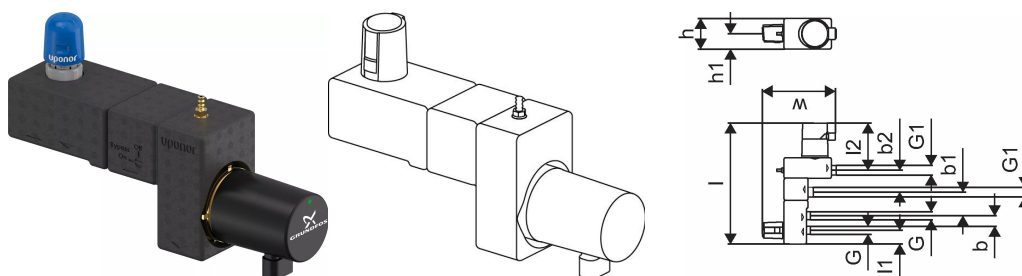

Technical data

Item no NRF	8361163
Item (unit of measurement)	Piece
Length (l)	332 mm
Length (l1)	38 mm
Length (l2)	129 mm
Z-measurement b	40 mm
Z-measurement b1	65 mm
Z-measurement b2	60 mm
Z-measurement h	84 mm
Z-measurement h1	42 mm
Z-measurement w	202 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	60

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com