


## Uponor Ecoflex VIP Thermo Pipe Single 110x10,0/175

**1095719**

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- VIP + PEX foam, HDPE casing

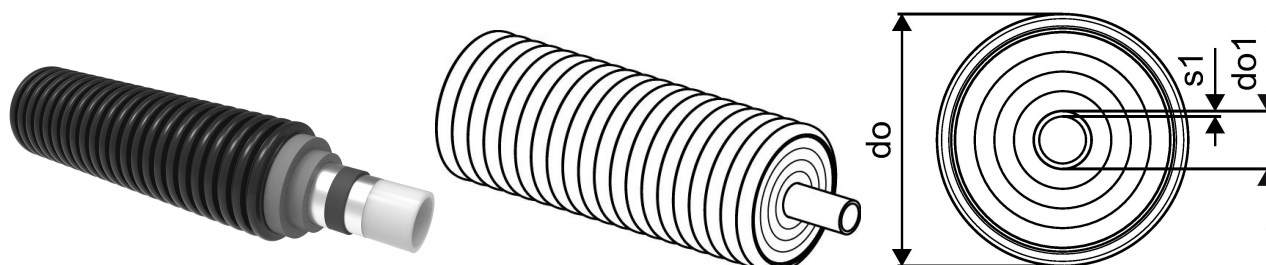

### Application information Uponor Ecoflex VIP Thermo Pipe Single

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural colored, PN 6 (SDR 11), Oxygen tightness based on EN 15632
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application

- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex VIP Thermo Pipe Single 110x10,0/175

1095719



### Measurements

Bending radius M	0,9
Outer Diameter_do	175
Outer Diameter_do1	110
Wall thickness_s1	10

### Product code

Item no EAN	6414905479184
Item no GF	35001095719
Item no GTIN	06414905479184
Item no LVI	3010240
Item no NRF	8360955
Item no RSK	2266365
Item no VVS	087808310
Item Replacement 1	1160606

### Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	5,06
Item Unit Width	175
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905640263
Packaging Height PL1	2200
Packaging Length PL1	2400
Packaging Quantity PL1	150
Packaging Type PL1	Coil
Packaging Volume PL1	7,392
Packaging Weight PL1	759,1

Packaging Width PL1


1400

## Status

Until stocks last

Until stocks last

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)