


Uponor Ecoflex Supra Pipe 110x10,0/200

1095729

- Cold potable water and cooling
- One medium pipe PE 100 RC black, SDR 11
- Max. load 16 bar / 20°C
- PEX foam, HDPE casing

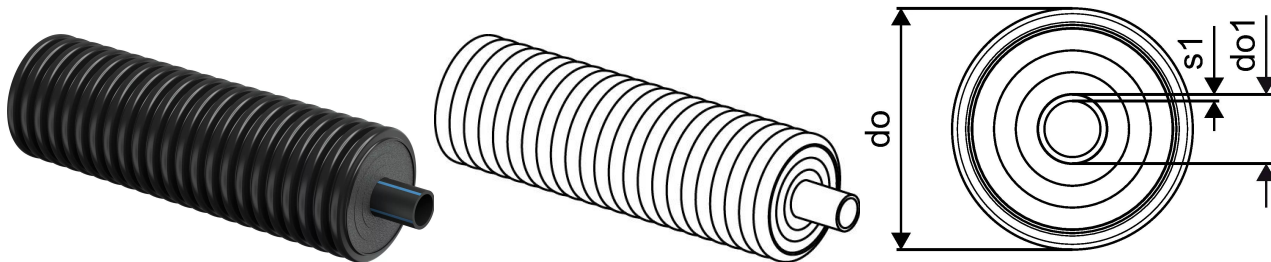

Application information Uponor Ecoflex Supra Pipe

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system
- Medium pipe: Polyethylene PE100 RC, PN 16 (SDR 11) black with blue stripes
- Insulating material: Closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of cold potable or cooling water for buried installations.
- Operating temperature +20°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Supra Pipe 110x10,0/200

1095729

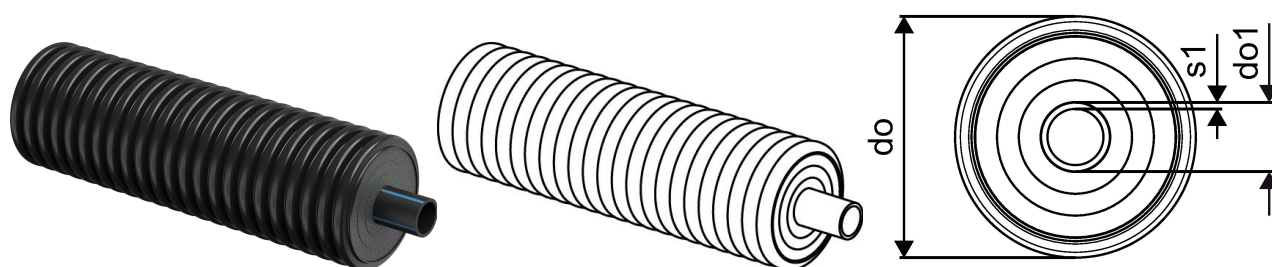

Measurements

Bending radius M	1,2
Outer Diameter_do	200
Outer Diameter_do1	110
Wall thickness_s1	10

Product code

Item no EAN	6414905486458
Item no GF	35001095729
Item no GTIN	06414905486458
Item no NRF	8361431

Dimensions

Item Unit Height	200
Item Unit Length	1000
Item Unit Weight	5,24
Item Unit Width	200
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905537952
Packaging Height PL1	2400
Packaging Length PL1	2400
Packaging Quantity PL1	100
Packaging Type PL1	Coil
Packaging Volume PL1	8,64
Packaging Weight PL1	524
Packaging Width PL1	1500

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com