


Uponor Ecoflex VIP Thermo Twin 2x25x2,3/140

1118580

- Heating and Cooling
- Two medium pipes PE-Xa with oxygen barrier, SDR11
- Max. Load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- VIP+PEX foam, HDPE casing

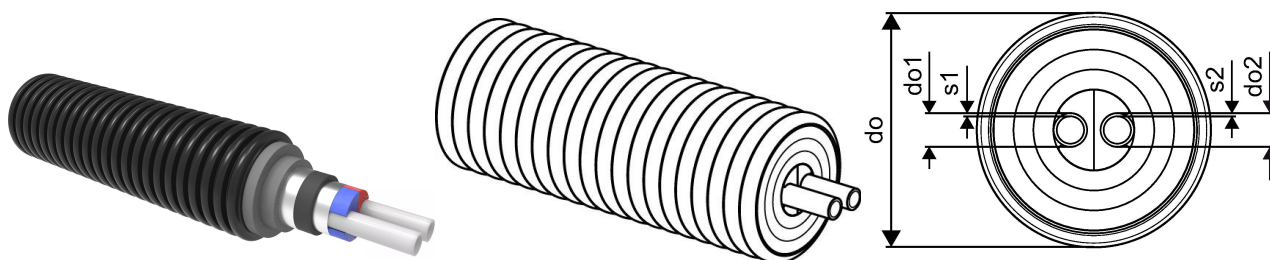

Application information Uponor Ecoflex VIP Thermo Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural colored, PN 6 (SDR 11), Oxygen tightness based on EN 15632
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex VIP Thermo Twin 2x25x2,3/140


1118580

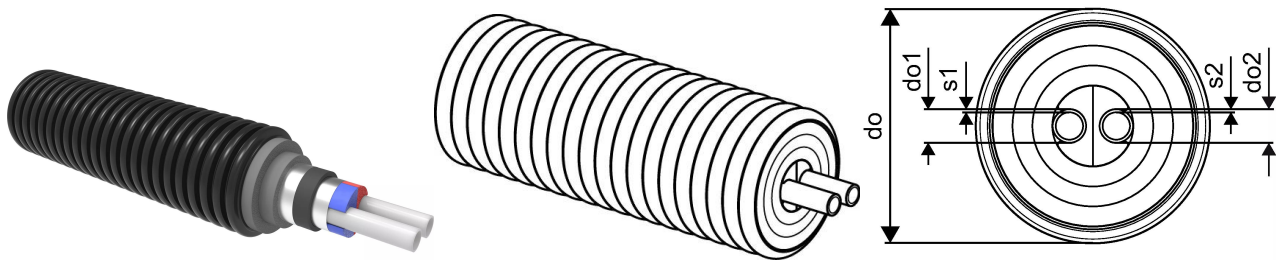

Technical data

| | |
|----------------------------|-----------|
| Item (unit of measurement) | m |
| Item no VVS | 087808425 |
| Item no LVI | 3010242 |
| Item no NRF | 8360957 |
| Bending radius 2 | 0,4 m |
| Packaging Quantity PL1 | 200 |

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com