

## Uponor Ecoflex VIP Thermo Pipe Twin 2x75x6,8/250

### 1118585

- Heating and Cooling
- Two medium pipes PE-Xa with oxygen barrier, SDR11
- Max. Load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- VIP+PEX foam, HDPE casing



### Application information Uponor Ecoflex VIP Thermo Pipe Twin

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural colored, PN 6 (SDR 11), Oxygen tightness based on EN 15632
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex VIP Thermo Pipe Twin 2x75x6,8/250

1118585

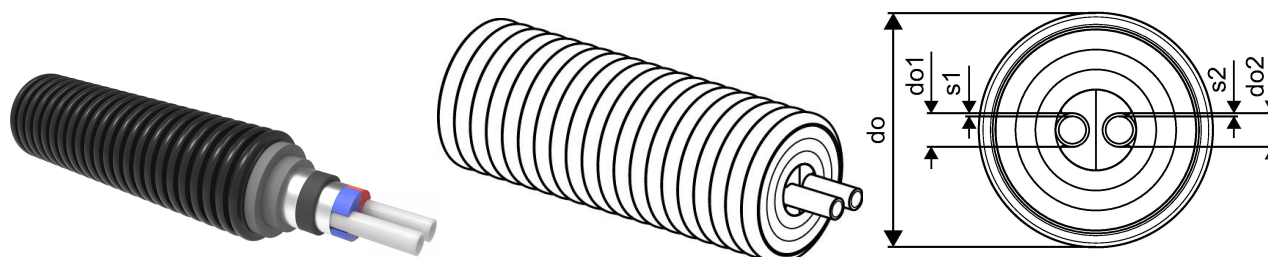

### Measurements

Bending radius M	1,4
Outer Diameter_do	250
Outer Diameter_do1	75
Outer Diameter_do2	75
Wall thickness_s1	6,8
Wall thickness_s2	6,8

### Product code

Item no EAN	6414905519156
Item no GF	35001118585
Item no GTIN	06414905519156
Item no LVI	3010247
Item no NRF	8360963
Item no RSK	2266372
Item no VVS	087808475
Item Replacement 1	1160615

### Dimensions

Item Unit Height	250
Item Unit Length	1000
Item Unit Weight	6,84
Item Unit Width	250
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905542581
Packaging Height PL1	2450
Packaging Length PL1	2450
Packaging Quantity PL1	100
Packaging Type PL1	Coil

Packaging Volume PL1	10,8045
Packaging Weight PL1	684
Packaging Width PL1	1800

## Status

Until stocks last	Until stocks last
-------------------	-------------------

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)