


## Uponor S-Press PLUS adapter PPM 16

1119005

- adapter Aqua PLUS

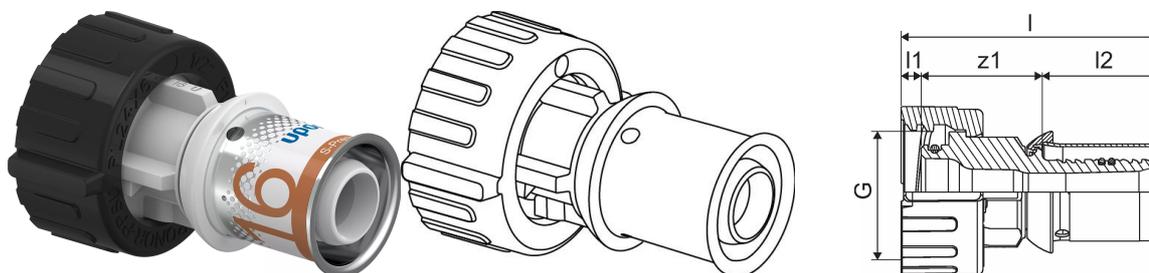

### Application information Uponor S-Press PLUS adapter PPM

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS adapter PPM 16

1119005

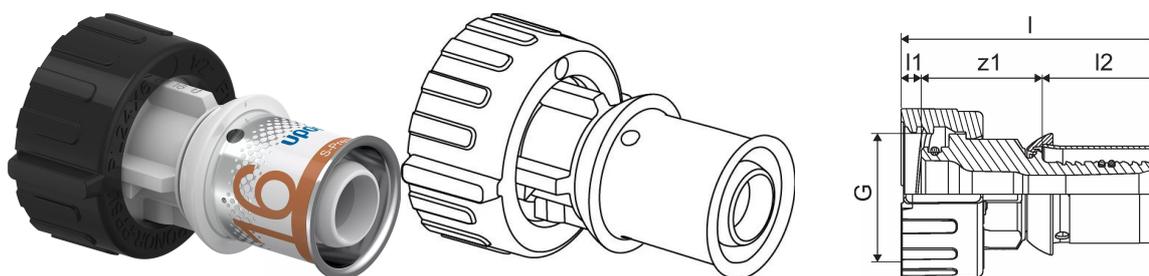

### Measurements

Cylindric_thread_G	PL24X6 1/2
LENGTH_L	45,7
Length (l1)	3,6
Length (l2)	20,5
z1	21,6

### Product code

Item no EAN	6414905554522
Item no GF	35001119005
Item no GTIN	06414905554522
Item no LVI	1720843
Item no NRF	5110302
Item no RSK	2054923
Item no VVS	087608216

### Dimensions

Item Unit Height	30
Item Unit Length	42
Item Unit Weight	0,018
Item Unit Width	35
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905554539
Packaging GTIN PL3	06414905554546
Packaging GTIN PL4	06414905554553
Packaging Height PL1	30
Packaging Height PL3	95
Packaging Height PL4	806
Packaging Length PL1	45

Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL3	30
Packaging Quantity PL4	3360
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00004725
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,77376
Packaging Weight PL1	0,028
Packaging Weight PL3	0,94
Packaging Weight PL4	130,28
Packaging Width PL1	35
Packaging Width PL3	179
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)