


## Uponor Ecoflex VIP Aqua Pipe Single 90x12,3/175

1119051

- Warm tap water
- One medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- VIP + PEX foam, HDPE casing

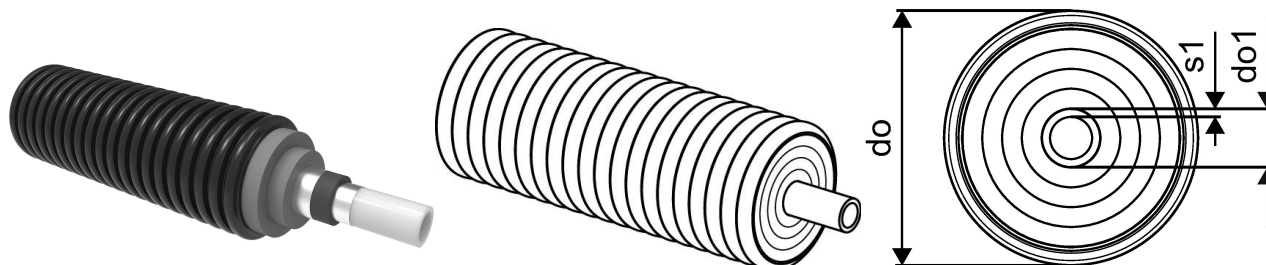

### Application information Uponor Ecoflex VIP Aqua Pipe Single

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application

- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approval should be checked by local responsible person

## Uponor Ecoflex VIP Aqua Pipe Single 90x12,3/175

1119051



### Measurements

Bending radius M	1,2
Outer Diameter_do	175
Outer Diameter_do1	90
Wall thickness_s1	12,3

### Product code

Item no EAN	6414905556335
Item no GF	35001119051
Item no GTIN	06414905556335
Item no LVI	3010297
Item no NRF	8360968
Item no RSK	2266377
Item no VVS	087364090
Item Replacement 1	1160620

### Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	4,88
Item Unit Width	175
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905556472
Packaging Height PL1	2200
Packaging Length PL1	2200
Packaging Quantity PL1	100
Packaging Type PL1	Coil
Packaging Volume PL1	6,292
Packaging Weight PL1	488

Packaging Width PL1

1300

## Status

Until stocks last

Until stocks last

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)