


Uponor Ecoflex VIP Aqua Pipe Twin 32x4,4-20x2,8/140

1119054

- Warm tap water
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- VIP + PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

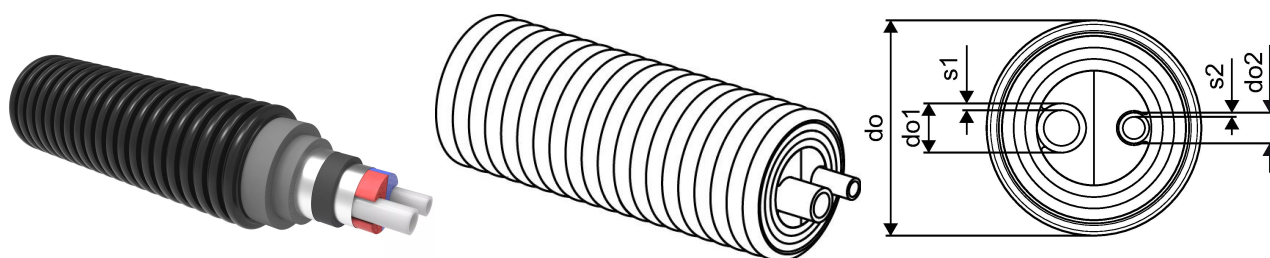

Application information Uponor Ecoflex VIP Aqua Pipe Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

Application

- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approval should be checked by local responsible person

Uponor Ecoflex VIP Aqua Pipe Twin 32x4,4-20x2,8/140

1119054



Measurements

| | |
|--------------------|-----|
| Bending radius M | 0,7 |
| Outer Diameter_do | 140 |
| Outer Diameter_do1 | 32 |
| Outer Diameter_do2 | 20 |
| Wall thickness_s1 | 4,4 |
| Wall thickness_s2 | 2,8 |

Product code

| | |
|--------------|----------------|
| Item no EAN | 6414905556366 |
| Item no GF | 35001119054 |
| Item no GTIN | 06414905556366 |
| Item no LVI | 3010300 |
| Item no NRF | 8360972 |
| Item no RSK | 2266380 |
| Item no VVS | 087364232 |

Dimensions

| | |
|------------------|------|
| Item Unit Height | 140 |
| Item Unit Length | 1000 |
| Item Unit Weight | 1,88 |
| Item Unit Width | 140 |
| Item_UOM | m |

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414905557936 |
| Packaging Height PL1 | 2200 |
| Packaging Length PL1 | 2200 |
| Packaging Quantity PL1 | 200 |
| Packaging Type PL1 | Coil |
| Packaging Volume PL1 | 7,26 |

Packaging Weight PL1

376

Packaging Width PL1

1500

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com