


Uponor Ecoflex VIP Aqua Twin 40x5,5-25x3,5/140

1119055

- Warm tap water
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- VIP + PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

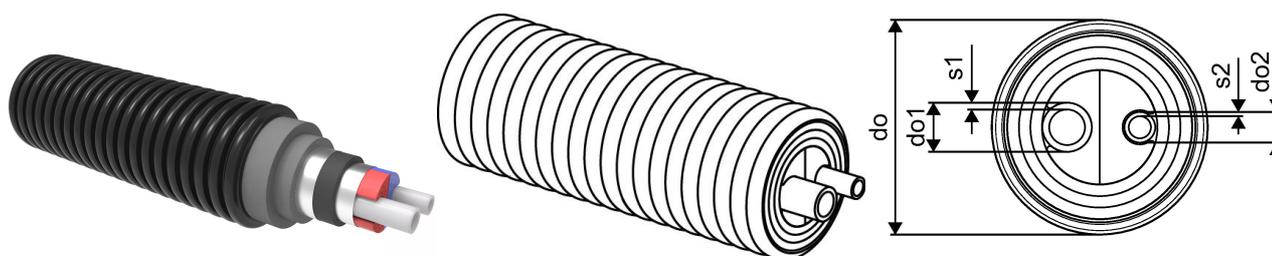

Application information Uponor Ecoflex VIP Aqua Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approval should be checked by local responsible person

Uponor Ecoflex VIP Aqua Twin 40x5,5-25x3,5/140

1119055

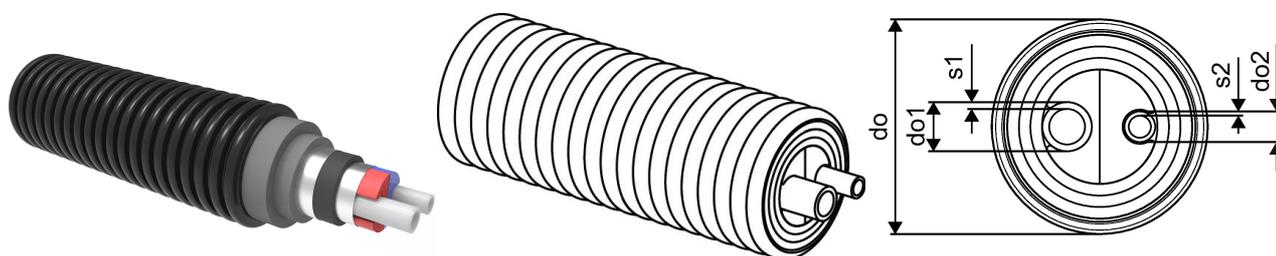

Measurements

| | |
|--------------------|-----|
| Bending radius M | 0,9 |
| Outer Diameter_do | 140 |
| Outer Diameter_do1 | 40 |
| Outer Diameter_do2 | 25 |
| Wall thickness_s1 | 5,5 |
| Wall thickness_s2 | 3,5 |

Product code

| | |
|--------------|----------------|
| Item no EAN | 6414905556373 |
| Item no GF | 35001119055 |
| Item no GTIN | 06414905556373 |
| Item no LVI | 3010301 |
| Item no NRF | 8360973 |
| Item no RSK | 2266381 |
| Item no VVS | 087364240 |

Dimensions

| | |
|------------------|------|
| Item Unit Height | 140 |
| Item Unit Length | 1000 |
| Item Unit Weight | 2,18 |
| Item Unit Width | 140 |
| Item_UOM | m |

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414905557943 |
| Packaging Height PL1 | 2200 |
| Packaging Length PL1 | 2200 |
| Packaging Quantity PL1 | 200 |
| Packaging Type PL1 | Coil |
| Packaging Volume PL1 | 7,26 |

| | |
|----------------------|-------|
| Packaging Weight PL1 | 436,1 |
| Packaging Width PL1 | 1500 |

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com