



## Uponor S-Press PLUS sound + leak protect 16-20

**1121193**

- Set is suitable for two Uponor S-Press PLUS tap elbows 16-Rp1/2"FT or 20-Rp1/2"FT
- Pins and screws M6 x 16 included
- Made of EPP
- Sound protection acc., VDI 4100
- Drainage function conform to DIN 18534

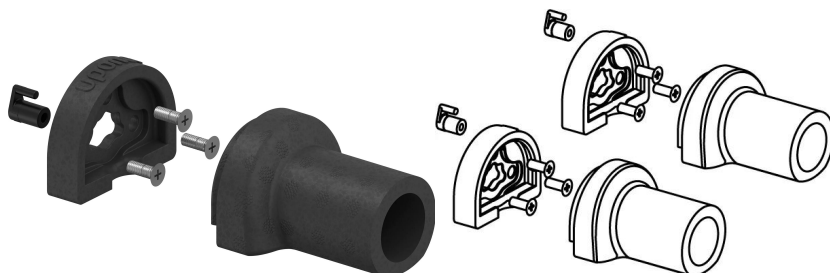

### Application information Uponor S-Press PLUS sound + leak protect

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS sound + leak protect 16-20

1121193

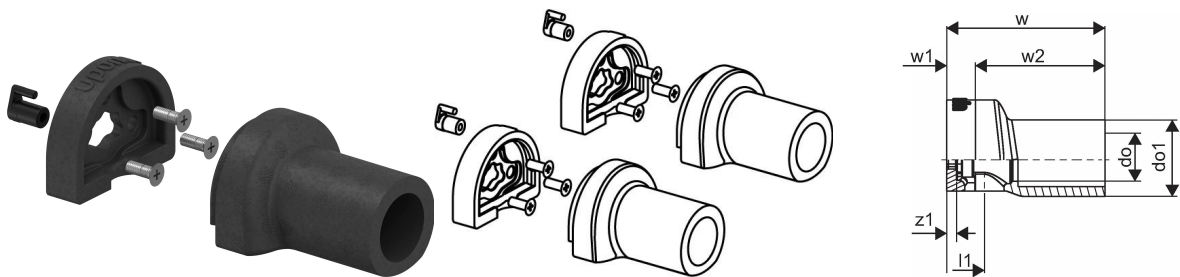

Technical data

Item (unit of measurement)	set
Length (l1)	20 mm
Length (l2)	74 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	192

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com