


Uponor Aqua pipe white opaque 16x2,2mm 100 m

1126786

- Material: PE-Xa
- Watermark approved
- Operating pressure 10 bar
- In coils

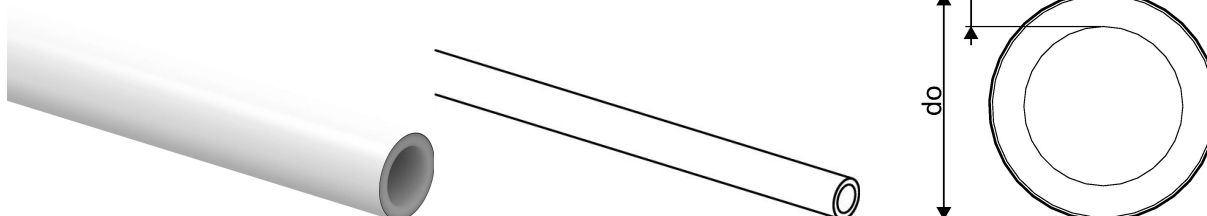

Application information Uponor Aqua pipe white opaque

Specification



- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua pipe white opaque 16x2,2mm 100 m

1126786

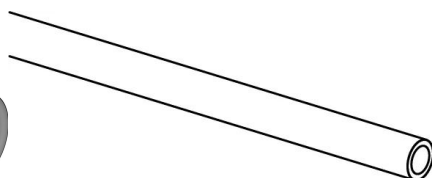

Product code

Item no EAN	6414905672585
Item no GF	35001126786
Item no GTIN	06414905672585

Dimensions

Item Unit Height	16
Item Unit Length	1000
Item Unit Weight	0,095
Item Unit Width	16
Item_UOM	m

Measurements

Outer Diameter_do	16
Wall thickness_s	2,2

Packaging

Packaging GTIN PL1	06414900480826
Packaging GTIN PL4	06414900438209
Packaging Height PL1	120
Packaging Height PL4	1580
Packaging Length PL1	760
Packaging Length PL4	760
Packaging Quantity PL1	100
Packaging Quantity PL4	1200
Packaging Type PL1	Coil
Packaging Type PL4	Pallet
Packaging Volume PL1	0,069312
Packaging Volume PL4	0,912608
Packaging Weight PL1	9,8
Packaging Weight PL4	124

Packaging Width PL1	760
Packaging Width PL4	760

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com