
Product data sheet



GF Uponor Aqua Pipe white opaque 25x3,5mm 100m

1126788

- Material: PE-Xa
- Watermark approved
- Operating pressure 10 bar
- In coils

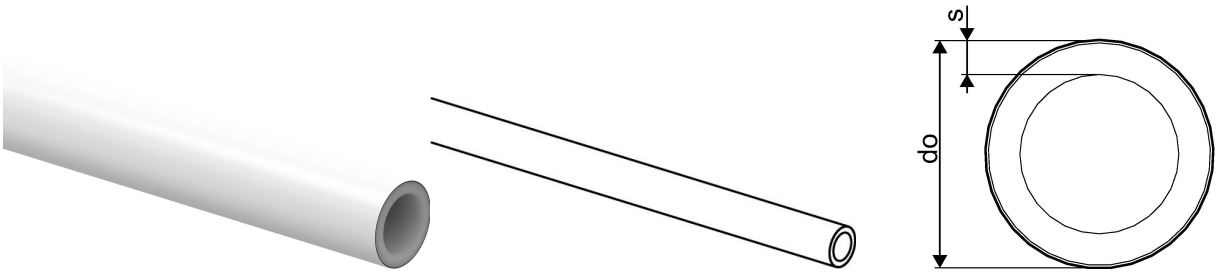

Application information GF Uponor Aqua Pipe white opaque

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) in accordance with EN ISO 15875
- Application class 2 – hot water supply
- Fire classification E according to DIN EN 13501-1
- Operating pressure up to 6 bar (PN6), depending on variant
- Available as plain pipe or pipe in protective conduit

Application

- Tap water installations for hot and cold water distribution
- Permanent operating temperature from 0 °C to 70 °C
- Short-term malfunction temperature up to 95 °C for a total of 100 hours over the service life

GF Uponor Aqua Pipe white opaque 25x3,5mm 100m

1126788

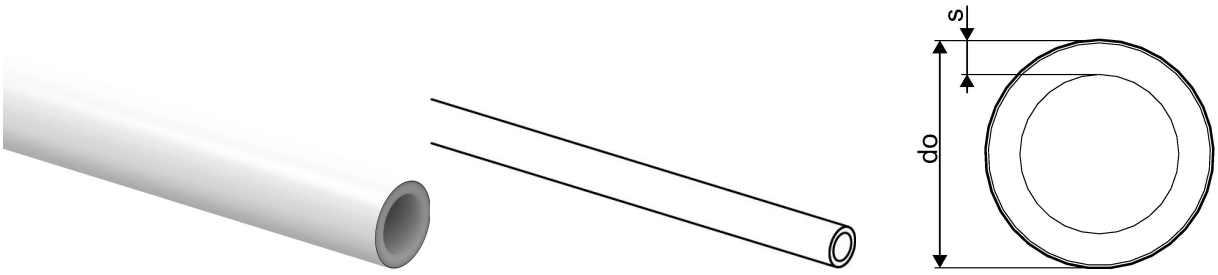

Product code

Item no EAN	6414905672608
Item no GF	35001126788
Item no GTIN	06414905672608

Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,242
Item Unit Width	25
Item_UOM	m

Measurements

Outer Diameter_do	25
Wall thickness_s	3,5

Packaging

Packaging GTIN PL1	06414900480840
Packaging GTIN PL4	06414900438223
Packaging Height PL1	210
Packaging Height PL4	1610
Packaging Length PL1	760
Packaging Length PL4	760
Packaging Quantity PL1	100
Packaging Quantity PL4	700
Packaging Type PL1	Coil
Packaging Type PL4	Pallet
Packaging Volume PL1	0,121296
Packaging Volume PL4	0,929936

Packaging Weight PL1	24,4
Packaging Weight PL4	179
Packaging Width PL1	760
Packaging Width PL4	760

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+