


Uponor Vario B manifold body FM 3x3/4 Euro

1135302

- Supply with flow meter for balancing and shutoff
- Return with valves and caps
- without primary connection

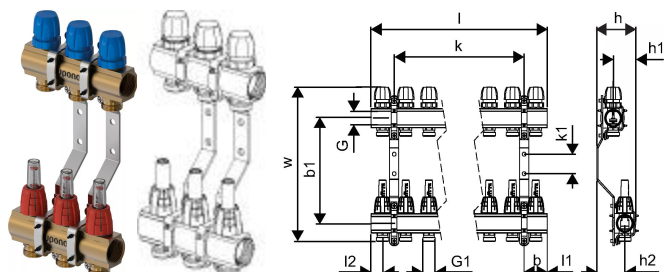

Application information Uponor Vario B manifold body FM

Specification


- Made of brass
- With integrated valves
- Connection right or left with flat sealing supply
- With lockshield valve or flowmeter for balancing and shutoff
- no primary connection to combine it with the correct accessories
- Loop connection G3/4" eurocone
- Loop distance 50 mm
- Bracket distance 210 mm

Application

- For underfloor heating and cooling
- Combineable with actuators FT 30x1,5
- Max. pressure: 6 bar at 60°C

Uponor Vario B manifold body FM 3x3/4 Euro

1135302

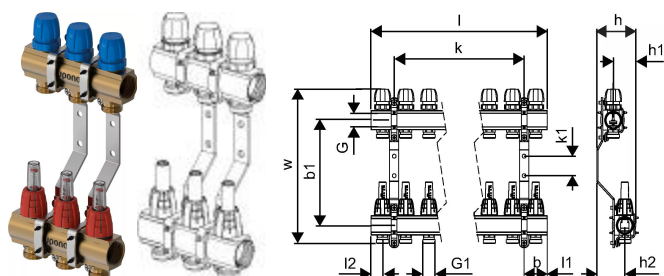

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com