


Uponor Vario B manifold body FM 12x3/4 Euro

1135311

- Supply with flow meter for balancing and shutoff
- Return with valves and caps
- without primary connection

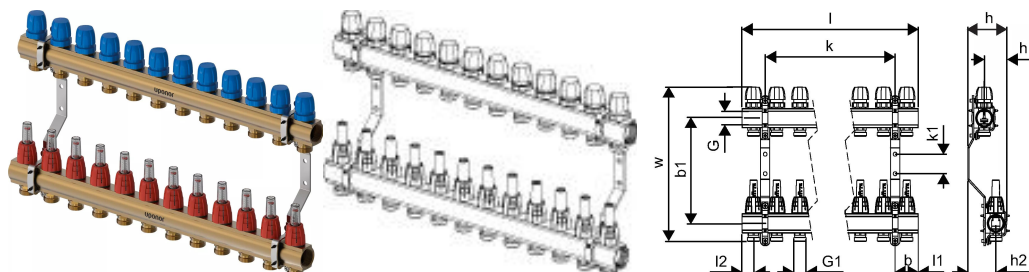

Application information Uponor Vario B manifold body FM

Specification


- Made of brass
- With integrated valves
- Connection right or left with flat sealing supply
- With lockshield valve or flowmeter for balancing and shutoff
- no primary connection to combine it with the correct accessories
- Loop connection G3/4" eurocone
- Loop distance 50 mm
- Bracket distance 210 mm

Application

- For underfloor heating and cooling
- Combineable with actuators FT 30x1,5
- Max. pressure: 6 bar at 60°C

Uponor Vario B manifold body FM 12x3/4 Euro

1135311

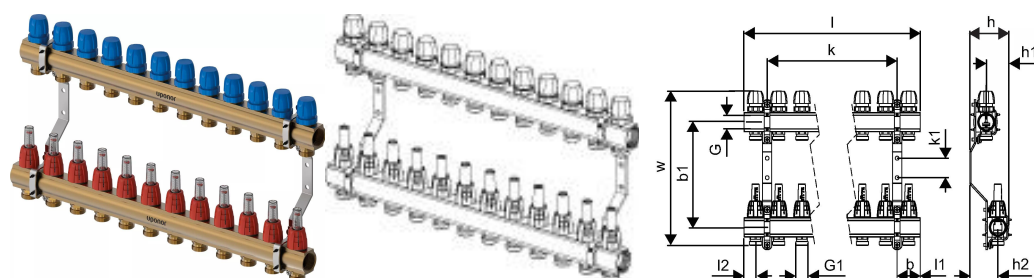

Technical data

Item (unit of measurement)	pce
Length (l)	500 mm
Length (l1)	25 mm
Length (l2)	25 mm
Z-measurement k	500 mm
Z-measurement b	50 mm
Z-measurement b1	210 mm
Z-measurement h	85 mm
Z-measurement h1	35,5 mm
Z-measurement h2	60,5 mm
Z-measurement k1	39 mm
Z-measurement w	308 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	54

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com