

Uponor Base controller H/C pump X-80 10x 230V


1138350

- Controller with autobalance function for 230V standard wiring
- supports up to 10 thermostats (230V)
- supports up to 12 actuators (230V) which can be fully flexible assigned
- noiseless actuator switching
- supports heating and cooling application
- autobalancing in heating optimises energy use and comfort
- switch to enable/disable the autobalance function
- pump and boiler relay
- time limit by-pass with autobalance
- inputs: heating/cooling switch, condensation, day/night switch.
- 4 wires for thermostat connection
- works with 3 wires thermostat (2 wires for power supply 230 V, 1 output 230 V demand) and 4 wires thermostat for full functionality (day/night signal)
- connection terminals for thermostat/actuator 0,13 ... 1,5 mm²
- overload protection
- protection class: IP20

- Note: for cooling condensation set S-80 is recommended

- Consisting of:

- Uponor Base controller X-80
- without power cable
- mounting material, DIN rail included

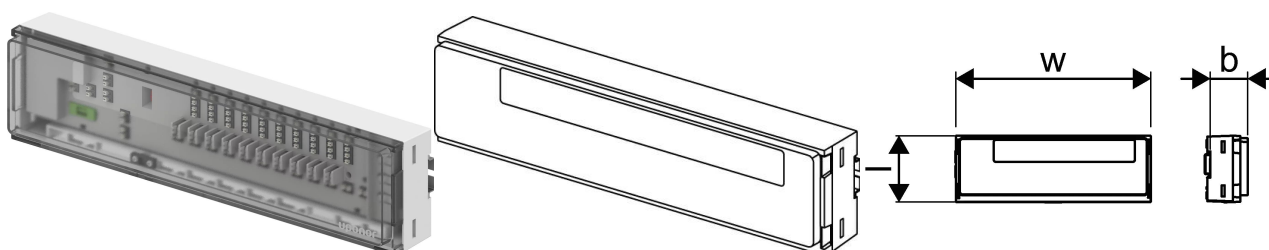

Application information Uponor Base controller H/C pump X-80

Specification

- 230V standard wiring
- common wiring method and controls logic
- easy integration to standard on/off time control
- optional: pump logic

Application


- wired room temperature control for radiant heating

Certification

- CE, UKCA

Uponor Base controller H/C pump X-80 10x 230V

1138350

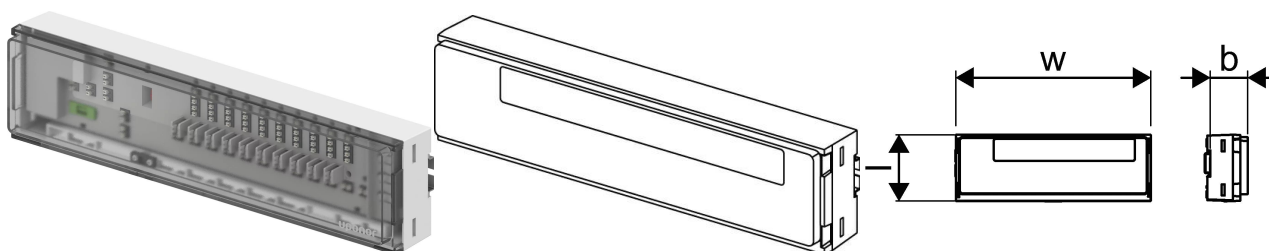

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com