


Uponor Vario S manifold FM 7xG3/4 Euro - G1

1140838

- Supply beam with flowmeters for balancing and shutoff, with memory ring
- Return beam with valves for shutoff, with hand caps

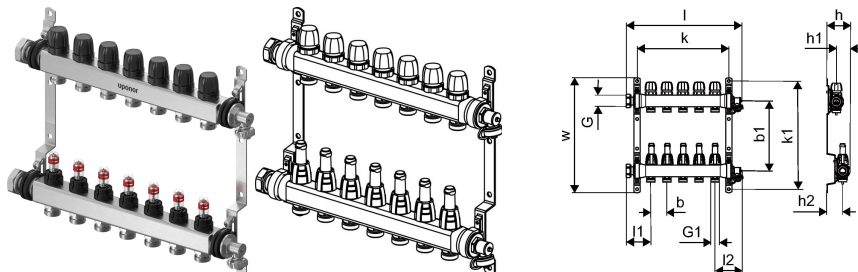

Application information Uponor Vario S manifold FM

Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

Application

- For underfloor heating and cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S manifold FM 7xG3/4 Euro - G1

1140838



Status

Item Available From date

2024-04-01

Product code

Item no EAN 6414900440455

Item no GF 35001140838

Item no GTIN 06414900440455

Item no LVI 2022295

Item no NRF 8361365

Dimensions

Item Unit Height 40

Item Unit Length 460

Item Unit Weight 4,5

Item Unit Width 235

Item_UOM pce

Measurements

LENGTH_L 464

Length (l1) 77

Length (l2) 87

Z Measurement b 50

Z Measurement b1 217

Z Measurement h 73

Z Measurement h1 30

Z Measurement h2 50

Z Measurement k 385

Z Measurement k1 336

Z Measurement w 357

Packaging

Packaging GTIN PL1

06414900500777

Packaging GTIN PL4	06414900322935
Packaging Height PL1	47
Packaging Height PL4	996
Packaging Length PL1	617
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	54
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,009221682
Packaging Volume PL4	0,95616
Packaging Weight PL1	4,7
Packaging Weight PL4	279
Packaging Width PL1	318
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com