


## Uponor Vario S manifold FM 9xG3/4 Euro - G1

1140840

- Supply beam with flowmeters for balancing and shutoff, with memory ring
- Return beam with valves for shutoff, with hand caps

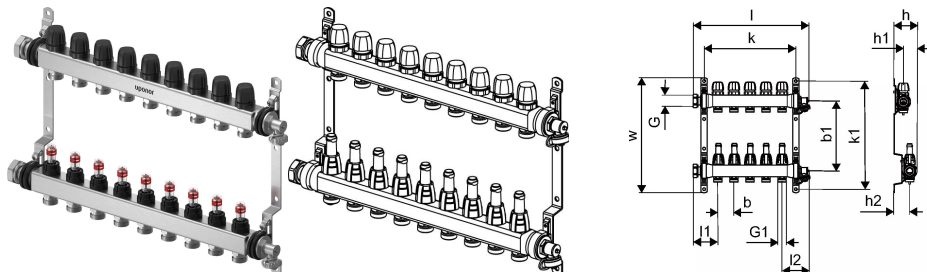

### Application information Uponor Vario S manifold FM

#### Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

#### Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S manifold FM 9xG3/4 Euro - G1

1140840

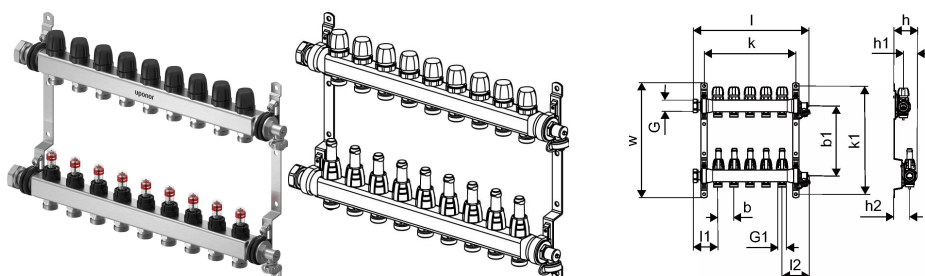

### Status

Item Available From date

2024-04-01

### Product code

Item no EAN 6414900440479

Item no GF 35001140840

Item no GTIN 06414900440479

Item no LVI 2022297

Item no NRF 8361367

### Dimensions

Item Unit Height 40

Item Unit Length 560

Item Unit Weight 5,5

Item Unit Width 235

Item\_UOM pce

### Measurements

LENGTH\_L 564

Length (l1) 77

Length (l2) 87

Z Measurement b 50

Z Measurement b1 217

Z Measurement h 73

Z Measurement h1 30

Z Measurement h2 50

Z Measurement k 485

Z Measurement k1 336

Z Measurement w 357

### Packaging

Packaging GTIN PL1

06414900500791

Packaging GTIN PL4	06414900322959
Packaging Height PL1	47
Packaging Height PL4	996
Packaging Length PL1	617
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	54
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,009221682
Packaging Volume PL4	0,95616
Packaging Weight PL1	5,6
Packaging Weight PL4	327
Packaging Width PL1	318
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)