


## Uponor Vario S manifold LS 3xG3/4 Euro - G1

**1140864**

- Supply beam with lock shield valves for balancing and shutoff
- Return beam with valves for shutoff, with hand caps

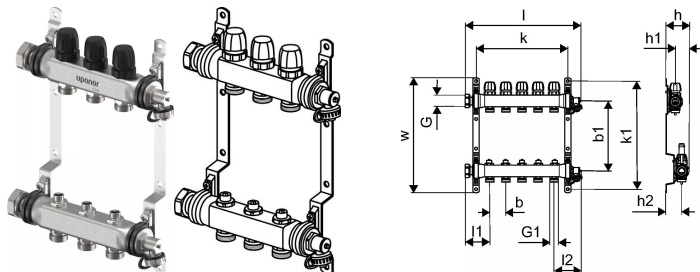

### Application information Uponor Vario S manifold LS

#### Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

#### Application

- For underfloor heating and cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S manifold LS 3xG3/4 Euro - G1

1140864

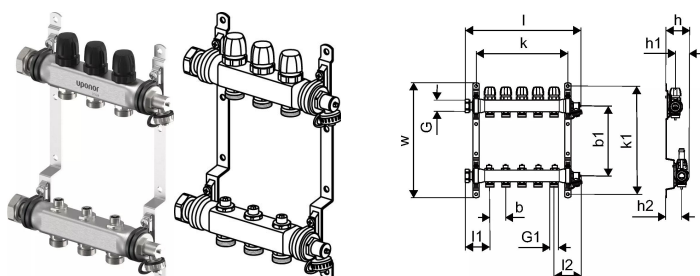

### Status

Item Available From date

2024-04-01

### Product code

Item no EAN	6414900440714
Item no GF	35001140864
Item no GTIN	06414900440714
Item no LVI	2022247
Item no NRF	8361373
Item no VVS	046230103

### Dimensions

Item Unit Height	40
Item Unit Length	260
Item Unit Weight	2,7
Item Unit Width	235
Item_UOM	pce

### Measurements

Length (l1)	264
Length (l2)	87
Z Measurement b	50
Z Measurement b1	217
Z Measurement h	73
Z Measurement h1	30
Z Measurement h2	50
Z Measurement k	185
Z Measurement k1	336
Z Measurement w	357

### Packaging

Packaging GTIN PL1

06414900500883

Packaging GTIN PL4	06414900501378
Packaging Height PL1	47
Packaging Height PL4	996
Packaging Length PL1	570
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	108
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00584022
Packaging Volume PL4	0,95616
Packaging Weight PL1	2,8
Packaging Weight PL4	327
Packaging Width PL1	218
Packaging Width PL4	800

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

E  
communications@georgfischer.  
com