


## Uponor Vario S manifold LS 4xG3/4 Euro - G1

### 1140865

- Supply beam with lock shield valves for balancing and shutoff
- Return beam with valves for shutoff, with hand caps

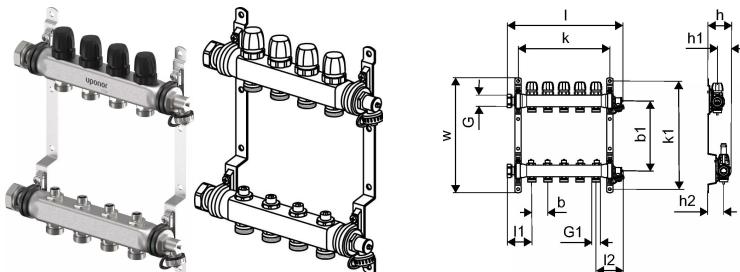

## Application information Uponor Vario S manifold LS



### Specification

- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

### Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S manifold LS 4xG3/4 Euro - G1 1140865

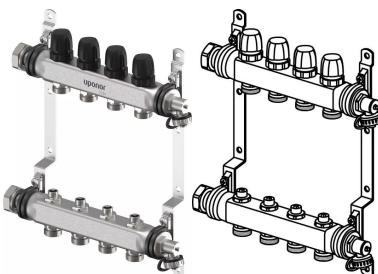

### Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)